

Multi-Objective Optimization of Drainage Networks for Flood Control in Urban Area Due to Climate Change [†]

Leonardo Bayas-Jiménez *, Pedro L. Iglesias-Rey and F. Javier Martínez-Solano

Department of Hydraulic Engineering and Environment, Universitat Politècnica de València, Camino de Vera s/n, 46022 Valencia, Spain; piglesia@upv.es (P.L.I.-R.); jmsolano@upv.es (F.J.M.-S.)

* Correspondence: leobaji@posgrado.upv.es; Tel.: +34-96-387-7610

† Presented at the 4th International Electronic Conference on Water Sciences, 13–29 November 2019;

Available online: <https://ecws-4.sciforum.net/>.

Published: 12 November 2019

Abstract: The Fifth Assessment Report (AR5) of the Intergovernmental Panel on Climate Change (IPCC) of the United Nations mentions that extreme rainfalls might increase their intensity and frequency in most mid-latitude locations and tropical regions by the end of this century, as a consequence of the rise of the average global surface temperature. Human action has given way to global warming which manifests with an increase in extreme rainfall. If these climatic conditions are added to the waterproofing that cities have been experiencing as a result of urban development, a scenario of growing concern for the managers of drainage systems is generated. The objective of drainage networks is preventing the accumulation of rainwater on the surface. Under the new conditions of climate change, these need to be modified and adapted to provide cities with the security they demand. The following article describes a method for flood control by using a rehabilitation model that connects the Storm Water Management Model (SWMM) 5 model with a genetic algorithm to find the best solutions to the flood problem. The final analysis is performed using the Pareto efficiency criteria. The innovation of this method is the inclusion of a local head loss in the drainage network, allowing the upstream flow to be retained by decreasing the downstream concentration time. These elements called hydraulic controls improve system performance and are installed in the initial part of some pipes coming out of storm tanks. As a case study, the developed method has been applied in a section of the drainage network of the city of Bogotá.

Keywords: drainage networks; climate change; flooding; optimization

PACS: J0101

1. Introduction

In recent years, extreme rains have increased their frequency. As a result, the drainage system experiences a hydraulic overload that can generate flooding. The effective intervention in these networks is important to give security to the cities. This is a task that researchers must consider.

Runoff control at source to prevent flooding is a field of study of great interest in urban hydraulics. One of the first investigations to retain runoff was carried out by Curtis and McCuen [1], who proposed a method to design retention basins emphasizing the importance of their location, the particle size distributions of sediments, the depth of the basin, the initial storage, and orifice diameter. Following this line of research, Goulter and Morgan [2] developed an optimization model based on dynamic programming to determine the minimum size and the best location of retention basins. In a later work, Bennett and Mays [3] propose a new optimization model that determines the minimum cost of a detention basin and the drainage channel system for a basin.

On the other hand, the use of storm tanks (STs) in urban areas to reduce the risk of flooding has been studied and proven as one of the most efficient methods to reduce surface runoff [4–8]. Cunha et al. [9] presented a method for the location and dimensions of STs and the outlet orifice. Using simulated annealing in their work, these authors mentioned the importance of a good dimensioning of the orifice, because this reduces the outflow of the storage unit that regulates the descending flows and allows a control of flow and a reduction of floods in all the network. Dziopak [10] proposes the use of the sewerage network as a storage unit as an economic alternative to the installation of STs taking advantage of all its components to temporarily store the water. For this purpose, the design is a retention channel with interior partitions in the form of chambers with an opening at the bottom of the channel, transforming the network into a retention channel. Leitão et al. [11] presented a model that uses an algorithm for the location of flow control devices in the drainage network in order to maximize storage inside the network. The model also considers the potential failure impact of the flow control device. They conclude that the storage capacity in the networks can be considerable. They mention that, if local flow control devices are installed correctly, the volume of water can be mobilized and become an interesting solution to mitigate flooding.

Ngamaliu-Nengoue et al. [12] conclude that the combined action of installing STs and the renewal of pipes is more effective than the separate intervention of these two techniques. In the results of their study in which they use a pseudo genetic algorithm they obtain an optimized diameter smaller than the original in certain pipes just downstream of the storage units. Hence, they point out the need to include a gate or orifice as a hydraulic control to introduce a head loss in the system. These results determine that hydraulic controls are presented as a technique to improve the efficiency of the system by allowing the accumulation of water at certain points in the network, which decreases the concentration time downstream and, therefore, floods. To continue with this line of research, the methodology proposed in this work includes the use of hydraulic control in the optimization of drainage networks. The focus of this study is to reduce the cost of rehabilitation of drainage networks and provide resilience to cities in climate change scenarios. Under these parameters, it is necessary to define two cost functions: one associated with the investment cost to improve the network (tank installation, pipe replacement) and on the other hand the cost of the damage that flooding can cause. To solve this problem, the optimization model considers using a multi-objective algorithm NSGA-II [13] connected to the Storm Water Management Model (SWMM) hydraulic simulation model using a toolkit [14]. These results have the purpose of helping the network managers make decisions to face the serious flood problem. As a case study, this methodology is applied in a sector of the drainage network of the city of Bogotá.

2. Methodology

The main objective of this work is to present a methodology to find the best solutions to adapt the drainage networks of cities to the conditions of climate change through a multi-objective algorithm as an optimization engine and the SWMM model as a hydraulic analysis tool. In this way, the following hypotheses are contemplated for their solution:

1. The design storm is considered static for the entire network.
2. The mathematical simulation model SWMM [15] is used as a network analysis tool. Dynamic wave analysis using the complete Saint-Venant equations is used.
3. The mathematical model of the network must be calibrated and simplified without this decreasing the reliability of the results.
4. The actions that will be taken are the renewal of conduits (C) with ones of greater diameter, the installation of Storm Tanks (STs), and the installation of hydraulic controls (HCs). Changes in the morphology of the network are out of this work.
5. The STs are considered installed on-line. The invert elevation is also considered the same of the existing manhole.
6. The optimization problem is analyzed in terms of costs. The cost function must be established based on the hydraulic variables and includes the cost of pipe renewal, the cost of installation of ST and the cost of damage caused by flooding.

7. The flood damage cost function does not consider intangible damage.

2.1. Decision Variables

The optimization problem of a drainage network considers three types of decision variables (DV). On the one hand, the optimization model seeks the best combination of network diameters of the pipes to minimize flooding in the network. This decision variable can vary from a value of 0 (the pipe is not replaced) to a maximum set value. The value 0 implies that the capacity of the pipe is enough to transport the analyzed flow rate while a different value indicates the need to increase the capacity of the pipe.

Another type of decision variables is the storage capacity of the nodes. The optimization model searches the best location of STs in the network and the lowest volume of STs to reduce flooding. When considering the problem in urban areas, the excavation is limited to the current invert elevation of the manhole, defining the cross section of the ST as DV. The DV can take values of 0 (ST is not required in the node) up to a maximum value previously defined depending on the available area. Since a heuristic optimization model is used, a discretization of the area is necessary. For this reason, a value is defined that divides the maximum area available for each node into a number of equal parts. The SWMM model [15] defines the cross section of an ST by Expression (1):

$$S = A_s z^{B_s} + C_s \tag{1}$$

where A_s , B_s , and C_s are adjustment coefficients of the tank section, and z is the maximum water level of the node. For tanks of a constant section, the coefficient A represents the cross section while the coefficients B and C are null.

Finally, another type of DV is the head loss coefficient introduced in certain network pipes. The use of hydraulic controls has been mentioned in previous works as a tool to limit the flow of water [10–12,16,17] retaining the upstream flow, which causes the water concentration time below to be smaller, reducing flooding. In this work, the inclusion of a minor head loss that is installed in the initial part of the pipes that come out of STs will be used as a hydraulic control. A minor head loss is caused by a rapid change in magnitude or direction of velocity, which may appear in curves, contractions, or extensions in the geometry of the pipe.

Local losses are represented as the product of a local loss coefficient and speed head by Expression (2):

$$\Delta h_L = K_m \frac{V^2}{2g} \tag{2}$$

The orifices are elements that are used as a hydraulic control. The head losses can be determined by Expression (3):

$$Q = C_d A \sqrt{2 g h} \Rightarrow \Delta h_L = \frac{1}{C_d^2} \frac{8 Q^2}{\pi^2 D_o^4 g} \tag{3}$$

where C_d is a dimensionless orifice discharge coefficient, and D_o is the orifice diameter. The proposed optimization model locates pipes that require hydraulic control to retain water and prevent flooding. This objective is achieved when the ST and the hydraulic control work together so that the location of the latter will be in the outlet pipe of certain STs. These DVs can take values from 0 (no hydraulic control is required) to a previously defined maximum value.

2.2. Objective Function

The objective function to be optimized is established in monetary units. It consists of three functions, as defined by Iglesias et al. [18] in Expression (4):

$$F = \lambda_1 \sum_{i=1}^m C(D_N(i)) + \lambda_2 \sum_{j=1}^n C(V_{ST}(j)) + \lambda_3 \sum_{k=1}^{N_F} C(V_I(k)) \tag{4}$$

where the first term in the equation represents the cost of pipeline renovation, the second term represents the cost of ST installation, and the third term represents the cost of damage caused by flooding. The terms are affected by a coefficient λ_i in case it is required to prioritize or minimize a term with respect to the others.

2.2.1. Pipe Replacement Cost Functions

This function, presented in Expression (5), represents the cost of changing pipes for others of greater capacity. The function is a polynomial of the second degree and is expressed as a function of the diameter. To establish this function, the market price of the pipes has been related to the corresponding diameter. The α and β coefficients are specific adjustment coefficients for each project.

$$C(D_i) = \alpha D_i + \beta D_i^2 \tag{5}$$

2.2.2. Storm Tank Installation Cost Functions

This function represents the cost of installing ST on the network. The expression has been set based on storage volume. The first term of the function represents a minimum cost established for the ST, while the second term is variable based on the required storage volume affected by a constant V and an exponent C . The function is presented by Expression (6):

$$C(V_j) = A + B V_j^C \tag{6}$$

2.2.3. Flood Damage Cost functions

This function represents the cost of damage caused by the flood. Iglesias et al. [18], based on previous studies [19], express this cost based on the depth that water reaches in a flood event. The expression is determined by a vulnerability curve that establishes the percentage of damage based on the level of water reached. The authors crossed this curve with the costs of flooding per square meter for different land uses. The equation shows the maximum cost C_{max} when the flood level y_{max} previously defined is reached. Coefficients λ and b are adjustment coefficients. The function is presented by Expression (7):

$$C(y_k) = C_{max} \left(1 - e^{-\lambda \frac{y_k}{y_{max}}} \right)^b \tag{7}$$

3. Case Study

The methodology was applied to a sector of the drainage network of the city of Bogotá, Colombia (Figure 1). This network called E-Chico consists of 35 hydrological sub-basins that cover an area of 51 hectares, 35 conduits, and 35 connection nodes. All pipes are circular with diameters ranging from 300 mm to 1400 mm, and they cover a length of approximately 5000 m. The network is completely gravity operated with a difference between the highest point and the lowest point of 39 m.

For the analysis, a design storm was used based on an Intensity–Duration–Frequency curve previously defined by Ngamalieu-Nengoue et al. [12] calculated using the alternate block method with 5 min intervals (Figure 2). The design storm was calculated under a climate change scenario [20].

The cost functions used in this work have been defined by Ngamalieu-Nengoue et al. [12]. The pipe replacement cost function is defined based on the actual prices of pipes in Colombia. The coefficients α and β of Equation (5) are established with the following values $\alpha = 40.69$ and $\beta = 208.06$. Therefore, the function is defined by Expression (8):

$$C(D_i) = 40.69 D_i + 208.06 D_i^2 \tag{8}$$

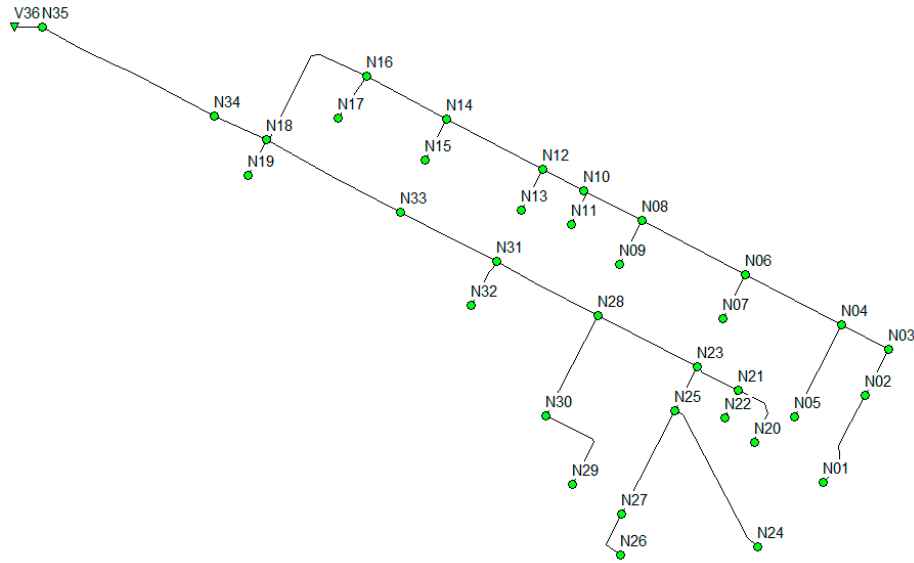


Figure 1. Representation of E-Chico drainage network.

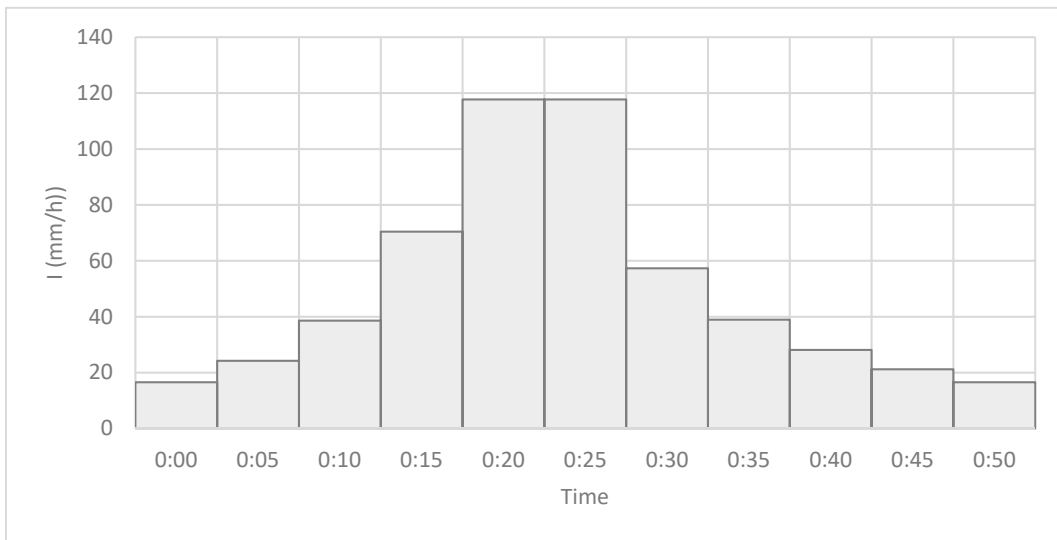


Figure 2. Design storm in the case study.

The coefficients A , B , and C of storm tank installation cost functions are determined based on the cost of materials and construction cost of the area under study. According to this, the function is defined by Expression (9):

$$C(V_j) = 16923 + 318.4 V_j^{0.65} \tag{9}$$

For this work, the maximum flood level is set at 1.4 m. The coefficients λ and b were determined in previous studies, and the values that best fit the analysis were $\lambda = 4.89$ and $b = 2$. While the maximum cost per square meter is the average for different types of land uses that establish this value at 1268 [12]. The function of flood damage is defined by Expression (10):

$$C(y_k) = 1268 \left(1 - e^{-4.89 \frac{y_k}{1.4}} \right)^2 \tag{10}$$

As a first step in the optimization process, it is required to know the current state of the drainage network. The hydraulic analysis in the SWMM model delivers the results shown in Table 1. These results show that the network does not offer the guarantees of operation to give security to the city; therefore, it must be rehabilitated. For the present work, a scenario has been considered where the

following decision variables are included: 35C + 35STs + 35HCs. In other words, the 35 nodes can be considered to install STs (35STs), the 35 conduits can be changed (35C), and hydraulic controls can be installed at the exit of the 35 STs (35HCs).

Table 1. Data of flooded nodes in the current state.

Node	Flood Volume (m ³)	Flood Area (m ²)	y _{max} (m)	Cost (€)
N02	123.56	1240	0.1	135,857.00 €
N04	132.56	930	0.413	181,375.00 €
N06	501.79	1890	0.265	875,502.00 €
N07	23.95	1250	0.019	6644.00 €
N09	1.82	1130	0.002	45.00 €
N10	385.12	700	0.55	646,838.00 €
N11	25.83	820	0.032	11,288.00 €
N23	949.54	450	2.11	569,922.00 €
N32	36.65	1500	0.024	12,727.00 €
N33	469.82	3030	0.155	671,908.00 €
N34	1181.87	3270	0.361	2,131,929.00 €
TOTAL				5,244,035.00 €

4. Results

In previous work [12], the optimization of the E-Chico drainage network was made with a pseudo-genetic algorithm considering the replacement of pipes and the installation of STs. The authors considered 5 different scenarios. Scenario 5 offers the best solution and considers the installation of 3 STs and the change of 3 pipes. For this solution, the objective function has a value of 213,981 €. Table 2 shows the results obtained. For this work, series of 50 simulations were performed to different combinations of parameters. The analysis was also performed using a pseudo genetic algorithm. Figure 3 represents the results of the best solution found. The installation of 3 STs on nodes N4, N10, and N23 is required. The renewal of the T02 and T03 pipes is also required. The renewal of pipes 2 and 3 is necessary, with an increase in diameters from 0.40 m to 0.45 m in both cases. Finally, the installation of hydraulic controls on the T04 and T10 pipes is required. The hydraulic controls must generate head losses with a value of 170.

Table 2. Result summary of the E-Chico Optimization Process.

Scenario	Objective Function	Term in Objective Function			No. of Elements in the Solution		
		Floods	STs	Pipes	STs	Pipes	HCS
[12]	213,981.00 €	12,701.00 €	186,353.00 €	14,927.00 €	3	3	0
Proposed	209,150.40 €	9061.91 €	188,957.79 €	11,130.70 €	3	2	2

Table 2 shows the results obtained in economic terms. The cost of implementing STs is 188,957.79 €, the cost of pipe renovation is 11,130.70 €, while the cost of damage caused by flooding is 9061.91 €. The value of the objective function is set at 209,150.40 €. The results show an improvement in the objective function with respect to the best solution obtained in previous studies.

Moreover, Figure 4 shows a Pareto front that represents the results of multi-objective optimization obtained by Ngamalieu-Nengoue et al. [17] and the results obtained in a multi-objective optimization using a NSGA-II with hydraulic controls. It is observed that the Pareto front improves significantly compared to previous studies, even when the flood is removed from the system. It should be noted that for the zero investment costs, the hydraulic control allows to reduce the flooding costs to almost half (from 5,236,200 € to 2,701,858 €). This demonstrates the convenience of including hydraulic controls in the optimization model.

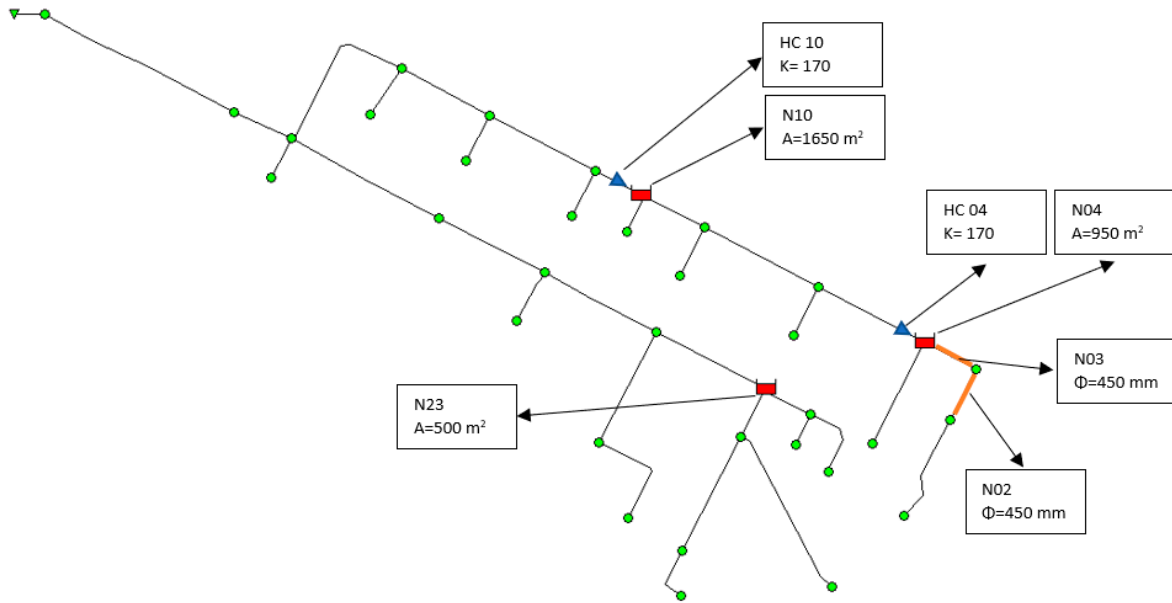


Figure 3. Representation of STs and HCs installed and pipes to replace according to results of the optimization model.

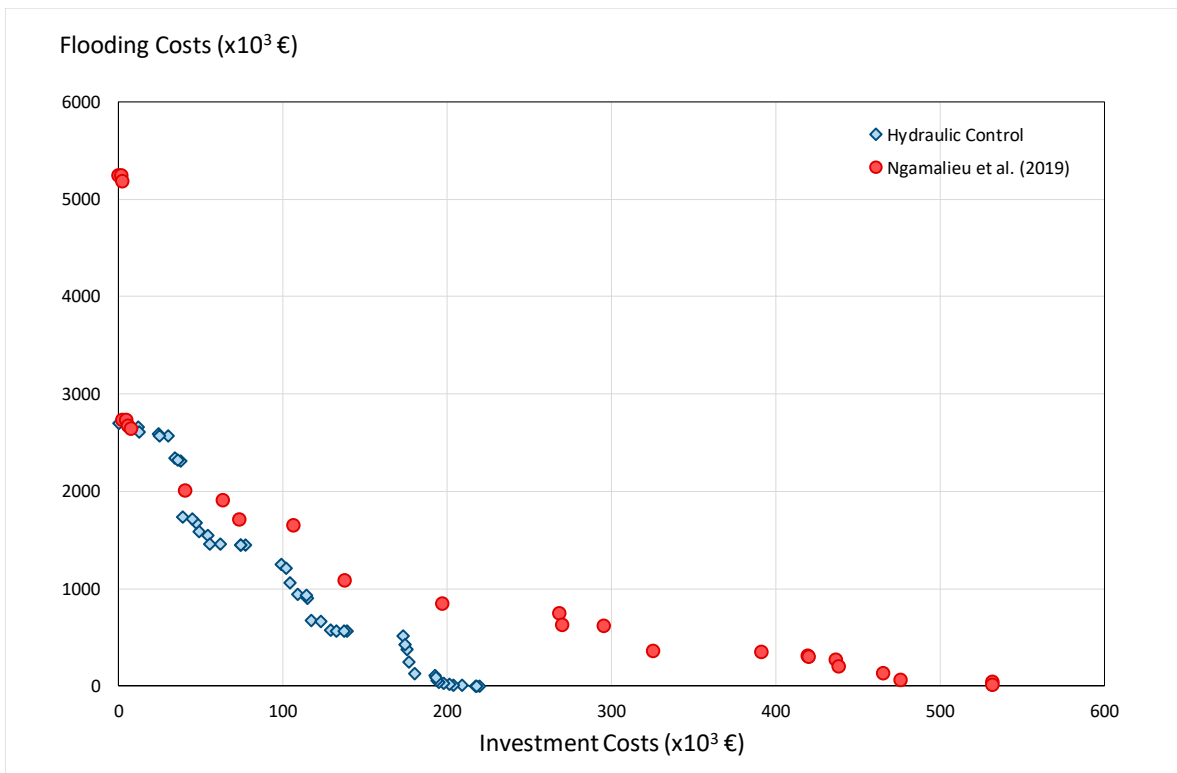


Figure 4. Pareto front representation of previous results and results with the inclusion of HCs.

5. Conclusions

After presenting the methodology and applying it to a specific case study, one can draw the following conclusions:

- The combined use of replacement pipes and the installation of STs and HCs is an appropriate methodology for optimizing drainage networks that require rehabilitation. The use of multi-objective evolutionary algorithms proves to be valid for this type of analysis.

- The main conclusion of this work is that the use of HC significantly decreases the cost of the intervention in the drainage network because it retains the water upstream using the volume of the network to momentarily store the water, making the system more efficient and avoiding accumulation downstream, avoiding flooding.

In short, this study shows that the inclusion of HCs improves the efficiency of the rehabilitation model of drainage networks.

Author Contributions: All authors contributed extensively to the work presented in this paper. All authors have read and agreed to the published version of the manuscript.

Conflicts of Interest: The authors declare no conflict of interest.

Abbreviations

The following abbreviations are used in this manuscript:

MDPI	Multidisciplinary Digital Publishing Institute
DOAJ	Directory of Open Access Journals
AR5	Fifth Assessment Report
ICCP	Intergovernmental Panel on Climate Change
ST	Storm Tank
DV	Decision Variable
HC	Hydraulic Control
IDF	Intensity, Duration, Frequency
NSGA	Non-dominated Sorting Genetic Algorithm
SWMM	Storm Water Management Model

References

1. Curtis, D.C.; McCuen, R.H. Design efficiencies of stormwater detention basins. *J. Water Resour. Plan. Manag. Div ASCE* **1977**, *103*, 125–140.
2. Goulter, I.C.; Morgan, D.R. Model for optimal size and location of detention. *J. Water Resour. Plan. Manag.* **1984**, *110*, 119–122.
3. Bennett, M.S.; Mays, L.W. Optimal design of detention and drainage channel systems. *J. Water Resour. Plan. Manag.* **1995**, *111*, 99–112.
4. Kessler, A.; Diskin, M.H. The efficiency function of detention reservoirs in urban drainage systems. *Water Resour. Res.* **1991**, *27*, 253–258.
5. Woods, B.B.; Kellagher, R.; Martin, P.; Jefferies, C.; Bray, R.; Shaffer, P. *The SUDS Manual (C697)*; CIRIA: London, UK, 2007; p. 600.
6. Todeschini, S.; Papiri, S.; Ciaponi, C. Performance of stormwater detention tanks for urban drainage systems in northern Italy. *J. Environ. Manag.* **2012**, *101*, 33–45.
7. Andrés-Doménech, I.; Montanari, A.; Marco, J.B. Efficiency of storm detention tanks for urban drainage systems under climate variability. *J. Water Resour. Plan. Manag.* **2012**, *138*, 36–46.
8. Wang, M.; Sun, Y.; Sweetapple, C. Optimization of storage tank locations in an urban stormwater drainage system using a two-stage approach. *J. Environ. Manag.* **2017**, *204*, 31–38.
9. Cunha, M.C.; Zeferino, J.A.; Simões, N.E.; Santos, G.L.; Saldarriaga, J.G. A decision support model for the optimal siting and sizing of storage units in stormwater drainage systems. *Int. J. Sustain. Dev. Plan.* **2017**, *12*, 122–132.
10. Dziopak, J. A wastewater retention canal as a sewage network and accumulation reservoir. In Proceedings of the E3S Web of Conferences, Polanica-Zdrój, Poland, 16–18 April 2018; Volume 45, p. 00016.
11. Leitão, J.P.; Carbajal, J.P.; Rieckermann, J.; Simões, N.E.; Marques, A.S.; de Sousa, L.M. Identifying the best locations to install flow control devices in sewer networks to enable in-sewer storage. *J. Hydrol.* **2018**, *556*, 371–383.
12. Ngamalieu-Nengoue, U.A.; Iglesias-Rey, P.L.; Martínez-Solano, F.J.; Mora-Meliá, D.; Valderrama, J.G.S. Urban drainage network rehabilitation considering storm tank installation and pipe substitution. *Water (Switzerland)* **2019**, *11*, 515.

13. Deb, K.; Pratap, A.; Agarwal, S.; Meyarivan, T. A fast and elitist multiobjective genetic algorithm: NSGA-II. *IEEE Trans. Evol. Comput.* **2002**, *6*, 182–197.
14. Martínez-Solano, F.J.; Iglesias-Rey, P.L.; Saldarriaga, J.G.; Vallejo, D. Creation of an SWMM toolkit for its application in urban drainage networks optimization. *Water (Switzerland)* **2016**, *8*, 259.
15. Rossman, L.A. “*Storm Water Management Model User’s Manual.*” Version 5.0; Cincinnati: National Risk Management Research Laboratory, Office of Research and Development, US Environmental Protection Agency: Cincinnati, OH, USA, 2010.
16. Cunha, M.C.; Zeferino, J.A.; Simões, N.E.; Saldarriaga, J.G. Optimal location and sizing of storage units in a drainage system. *Environ. Model. Softw.* **2016**, *83*, 155–166.
17. Ngamalieu-Nengoue, U.A.; Martínez-Solano, F.J.; Iglesias-Rey, P.L.; Mora-Meliá, D. Multi-objective optimization for urban drainage or sewer networks rehabilitation through pipes substitution and storage tanks installation. *Water (Switzerland)* **2019**, *11*, 935.
18. Iglesias-Rey, P.L.; Martínez-Solano, F.J.; Saldarriaga, J.G.; Navarro-Planas, V.R. Pseudo-genetic Model Optimization for Rehabilitation of Urban Storm-water Drainage Networks. *Procedia Eng.* **2017**, *186*, 617–625.
19. Lee, E.H.; Kim, J.H. Development of resilience index based on flooding damage in urban areas. *Water (Switzerland)* **2017**, *9*, 69.
20. Gulizia, C.; Camilloni, I. Comparative analysis of the ability of a set of CMIP3 and CMIP5 global climate models to represent precipitation in South America. *Int. J. Climatol.* **2015**, *35*, 583–595.



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).