

Document downloaded from:

<http://hdl.handle.net/10251/193719>

This paper must be cited as:

Clairand, J.; González-Rodríguez, M.; Kumar, R.; Vyas, S.; Escrivá-Escrivá, G. (2022). Optimal siting and sizing of electric taxi charging stations considering transportation and power system requirements. *Energy*. 256:1-13. <https://doi.org/10.1016/j.energy.2022.124572>



The final publication is available at

<https://doi.org/10.1016/j.energy.2022.124572>

Copyright Elsevier

Additional Information

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Highlights

Optimal Siting and Sizing of Electric Taxi Charging Stations Considering Transportation and Power System Requirements

Jean-Michel Clairand*, Mario González-Rodríguez, Rajesh Kumar, Shashank Vyas, Guillermo Escrivá-Escrivá,

- Optimal siting and sizing of electric taxi charging stations are considered with coupled transportation and power systems.
- The methodology is crucial for aiding municipalities in identifying appropriate location and number of ET charging spots.
- The modeling results were validated with actual data considering specific taxi driving behavior.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

Optimal Siting and Sizing of Electric Taxi Charging Stations Considering Transportation and Power System Requirements

Jean-Michel Clairand^{*,a}, Mario González-Rodríguez^a, Rajesh Kumar^b,
Shashank Vyas^c, Guillermo Escrivá-Escrivá^d,

^a*Facultad de Ingeniería y Ciencias Aplicadas, Universidad de las Américas, 170122, Quito, Ecuador*

^b*Department of Electrical Engineering, Malaviya National Institute of Technology, Jaipur, India*

^c*SoftBank Energy Private Limited, New Delhi, India*

^d*Institute for Energy Engineering, Universitat Politècnica de València, 46022, Valencia, Spain*

Abstract

31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

Electric vehicles (EVs) have become more popular to address transportation-related environmental concerns. However, to integrate a massive fleet of EVs, it is crucial to properly build charging stations by considering the optimal geographical placement and number of charging spots. This task is particularly challenging for users with rigid schedules such as taxi drivers. Hence, an optimal siting and sizing approach for an electric taxi (ET) charging station is proposed in this study, considering both transportation and power system needs. In addition, particular attention to taxi drivers' needs is considered. Fixed installation costs, land costs, and trip costs are the factors evaluated in this proposed approach. A network modeling approach based on a winner-takes-all edge trimming was used to identify interest points of the city in terms of traffic flows. Ecuador's capital, Quito, was considered a case study. A sensitivity analysis was also carried out to address traffic flow uncertainties such as trip expenses and restrictions.

Keywords: Charging station, Electric vehicle, Power distribution systems,

^{*}Corresponding author.

Email address: jean.clairand@udla.edu.ec (Jean-Michel Clairand^{*})

Nomenclature

Indices

i, j Index for nodes in transportation network

k Index for charging station

s Index for electric substation

v Index for electric taxi

Parameters

β Weighted resource leveling

$\Delta D_{k,k+1}$ Resource leveling term between consecutive charging stations

η Charging efficiency of charging spot [%]

ω Monetary value of travel time

\bar{I}_k Current limits at station k [A]

\bar{N}_{ch} Upper limit for number of charging spots in each charging station

\bar{P}_{ch} Maximum charging power for ET charging station [kW]

\underline{N}_{ch} Lower limit for number of charging spots in each charging station

$\underline{Q}_k, \bar{Q}_k$ Reactive power limits at station k [kVar]

$\underline{V}_k, \bar{V}_k$ Voltage limits at station k [V]

d_{ij} Distance matrix element

DT_k Mean travel distance of station k

E_{av} Average daily electricity energy required by each ET v [kWh]

E_{req} Total electricity energy required to charge all ETs [kWh]

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- f_{ij} Time (flow) matrix element
- N_V Number of taxis in Quito
- N_K Number of interest locations for ET charging stations
- P_s^F Feeder capacity at substation s [kW]
- T Time horizon for charging ETs in the charging stations in a day [h]
- V_D Voltage drop [V]
- V_{SS} Substation voltage[V]
- x_k^{in} (Time) Flow indegree
- x_k^{tot} Total flow degree
- x_k^{out} (Time) Flow outdegree

Sets

- \mathcal{E} Set of edges of transportation
- \mathcal{G} Graph
- \mathcal{K} Set of charging stations
- \mathcal{N} Set of transportation nodes
- \mathcal{S} Set of electric substations
- \mathcal{V} Set of ETs

Variables

- C^m Material costs [\$]
- C^w Workforce costs [\$]
- C_k Total investment cost for a charging station k [\$]
- C_k^{it} Installation costs [\$]
- C_k^l Land cost for each charging station k [\$]

- 1
2
3
4
5
6
7
8
9 C_k^{tr} Travel cost for each charging station k [\\$]
10
11 n_k Number of charging spots at charging station k
12
13

14 **1. Introduction**

15
16 Electric vehicles (EVs) have emerged as a viable option for address-
17 ing transportation-related environmental concerns, particularly emission of
18 greenhouse gases (GHGs) from burning fossil fuels. EVs are considerably
19 more efficient than cars with internal combustion engines (ICEs). They do
20 not pollute locally, and their average worldwide pollution level is lower, es-
21 pecially with greener charging sources that use renewable energy [1; 2].
22
23

24 EVs entail a number of potential difficulties that must be overcome. It
25 has been shown that large-scale use of EVs may result in power grid diffi-
26 culties including power losses, voltage sags, and voltage variations [3; 4; 5].
27 Thus, power system restrictions must be considered in charging solutions [6].
28 Compared with ICE cars, EVs have a restricted driving range, which can
29 cause "range anxiety," the concern of not having sufficient electrical energy
30 in the battery. Range anxiety may be exacerbated for taxi drivers, whose
31 charging behavior is likely to be considerably less flexible.
32
33

34 Studies examining the planning and functioning of EV charging stations
35 have been documented. Several studies have investigated the operation and
36 scheduling of EV charging stations [7], charging navigation systems for EV
37 charging stations [8], and transportation and electric power networks [9].
38

39 Several studies have investigated the siting and sizing of EV charging
40 stations. An optimal planning of plug-in EV fast charging stations using an
41 auction-based method was proposed [10]. A unsupervised learning method-
42 ology for deploying charging public infrastructure for EVs in sprawling cities
43 was proposed [11]. Fast-charging station siting and sizing based on a mixed-
44 integer nonlinear programming approach was proposed [12]. A station in the
45 EV charging station planning problem was assumed, in which an investor
46 intended to maximize profit in a competitive environment [13]. A robust
47 model of EV charging station location considering renewable energy and
48 storage equipment was studied [14]. The authors of [15] determine the optimal
49 charging station placement considering V2G technology, by considering the
50 minimization of line loading, voltage deviation, and circuit power loss. The
51 optimization is performed through quantum binary lightning search
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9 algorithm, which is an heuristic optimization technique. In [16], a queuing-
10 theory-based charging station sizing algorithm that benefits EV users and
11 improves spots capacity utilization is proposed. The case study of Al Ain City,
12 UAE, is studied. These studies have reported essential findings for EV
13 charging station sizing and siting. However, they have mainly considered
14 power system requirements; traffic constraints were not considered simulta-
15 neously.
16
17

18 Other studies have focused only on road congestion, with minimal or no
19 power grid limitations. The optimal location of an EV charging station was
20 obtained based on actual vehicle travel patterns [17]. Pile assignment was
21 used in the charging station placement problem [18]. A sizing and siting
22 model was proposed considering EV characteristics such as EV flow and
23 charging station technical specifications [19]. A data-driven intelligent loca-
24 tion of public charging stations for EVs was performed considering massive
25 GPS-enabled trajectory data [20]. The growth of electric vehicles in urban
26 traffic networks is linked to the development of charging infrastructure. Cur-
27 rently, siting and sizing of EV charging stations is an open problem. The paper
28 [21], describes the process of sizing and placing electric vehicle charging
29 stations, establishing variables to represent charging demand, modeling the
30 structure of the road network using graph theory, and solving an optimiza-
31 tion problem. The model's goal is to reduce the combined cost of charging
32 stations and users. The calculations show that the strategy can effectively cut
33 construction and operation expenses, as well as facilitate user pricing, from
34 Stockholm, Sweden.
35
36
37
38
39

40 Increasing the usage of electric energy for transportation and promoting
41 EVs to reduce harmful emissions and noise is a worldwide trend. Common
42 difficulties when it comes to the location of charging stations are related to
43 budget and geographical constraints. The authors of [22] proposed a method
44 that enables for the selection of a subset of existing parking lots for selecting
45 the siting of the charging stations. In this work, a set of optimal solutions for
46 multiple predefined restrictive and partially contradictory criteria was
47 established using a genetic algorithm combined with fuzzy logic and Pareto
48 front analysis. In [23], the location optimization of EV charging stations is
49 performed by covering economic and environmental costs and using geo-
50 graphical information from Ireland. The authors of [24] propose a techno-
51 economic optimization of renewable-based charging stations in Qatar, where
52 the configuration with the least net present cost is selected.
53
54
55

56 To date, a limited number of studies have investigated coupled power and
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9 traffic constraints for siting and sizing of EV charging stations. The siting and
10 sizing problem includes power and traffic system constraints; however, the
11 land cost was not considered in the placement conditions [25]. An optimal
12 planning method was studied for the location of fast charging station for EVs
13 considering operators, drivers, vehicles, traffic flow, and power grid [26]. The
14 optimal location and sizing of fast-charging stations was studied [27]. A
15 methodology that find the optimal location and size of public charging
16 stations, which can maximize the benefit of the investment, was considered
17 [28]. A multi-objective synergistic planning approach for EV fast-charging
18 stations was proposed for integration into the distribution system [29]. A
19 network equilibrium model that captured the spatial and temporal variations
20 of power and traffic flows was studied [30]; these variations are helpful in the
21 siting and sizing of charging stations. In [31], a zonal approach is proposed for
22 the siting and sizing of fast-charging stations. The authors of [32] propose a
23 sizing of plug-in EV fast-charging stations with Markovian demand
24 characterization; nonetheless, the siting problem is not considered. In [33], a
25 graph automorphic approach is considered for the placement and sizing of
26 charging stations.

27
28 Although these and other studies have recommended the optimal location
29 and size of EV charging stations, they have focused on passenger automobiles.
30 The location and size of charging stations for public transportation with vari-
31 able schedules, such as electric taxis (ETs), have received less attention. The
32 allocation of fast-charging ET stations was proposed, with particular atten-
33 tion to taxi services [34; 35; 36]; however, power system conditions were not
34 strongly considered. Several studies have considered construction of fast-
35 charging stations, which has been linked to battery degradation. Their time
36 and location requirements differ from those of private passenger EVs. In-
37 stallings only fast-charging stations for ETs is not technically advisable, as it
38 may cause battery damage leading to unusability.

39
40 The majority of studies discuss theoretical instances rather than realis-
41 tic case studies, using restricted data and assumptions rather than actual
42 data that considers transportation circumstances. Coordinated ET charg-
43 ing station siting and sizing based on real-world traffic and power-system
44 circumstances are proposed in this study. This paper is an extension of a
45 previous conference [37], which has significantly been improved. The key
46 contributions of this study are presented as follows.

- 47 • A comprehensive siting and sizing methodology for ET charging sta-

1
2
3
4
5
6
7
8
9 tions is developed based on actual data. Particular attention is devoted
10 to the needs of taxi drivers regarding operating schedules by considering
11 trip costs.
12

- 13 • The optimal investment for charging stations is determined by consid-
14 ering power grid and transportation constraints to ensure sustainable
15 purchase of ETs.
16
- 17 • A sensitivity analysis is performed to resolve uncertainties, considering
18 probable trip expenses and restrictions to present more realistically
19 acceptable results.
20
21
22

23 The remainder of this paper is organized as follows: The approach for
24 location and sizing of ET charging stations is described in Section 2. The
25 case study and assumptions are presented in Section 3. Section 4 discusses
26 the results of the case study. Section 5 summarizes the key conclusions.
27
28

29 **2. Methodology for sizing and locating charging stations**

30
31

32 The recommended strategy for locating and sizing ET charging stations
33 is presented in this section. The first step consists of identifying potential
34 locations for ET charging stations based on actual traffic conditions. After
35 identifying the interest points, the optimal number of charging spots to be
36 installed is calculated.
37

38 For the siting and sizing of EV charging stations specifically for taxis,
39 a technical criterion that can help determine the location and number is
40 the type of road. For example, on urban roads, charging stations include
41 fewer charging spots because they use the existing low-voltage power distri-
42 bution infrastructure of such roads. From the transformers that already feed
43 different loads (homes and businesses), the distribution company installs in-
44 dividual charging points distributed along the street or at taxi stops. Thus,
45 both low-voltage cabling and transformers are available for charging at night
46 when the consumer load (homes and businesses) decreases. Capacity is avail-
47 able for charging point loads. A flowchart of the proposed methodology is
48 presented in Figure 1.
49
50
51
52

53 *2.1. Transportation Modeling*

54

55 For the transportation modeling, points of interest around the city are
56 identified. The city street network was modeled as a graph, built using
57
58

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

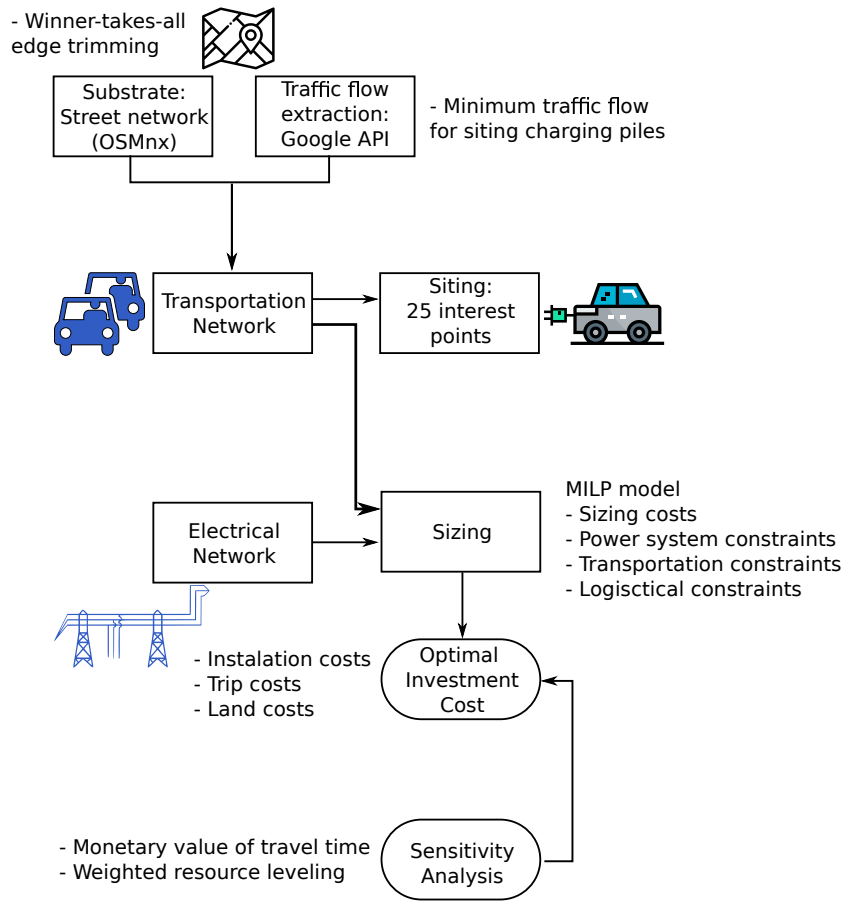


Figure 1: Flowchart of proposed ET charging station siting and sizing methodology.

the Python OSMnx API [38], where nodes are interest points connected by streets in a driving path, where the driving distance and time were acquired using the Google Directions API. The interest points are determined using an edge trimming heuristic for simplifying the city street graph, based on a winner takes all approach, where the best edge was selected during the trimming process. The resulting graph gives us the interest points with the best connections. The process is mostly automated, which is useful to model city street networks and traffic flow. In this particular case, we are not building all possible origin and destinations for taxis but based our analysis on the resulting network of interest points around the city [21; 22].

Other usual approach for trimming a graph is based on node removal

1
2
3
4
5
6
7
8
9 instead of edge removal, as is our case. The trimming is done from the struc-
10 tural properties of the network, i.e., the edge length. A structural measure
11 for the nodes usually employed is the network degree, for the city network,
12 given that is a regular grid (approximately), node based measured are pretty
13 uniform. Thus, we carry out the trimming based on edges, as built from iden-
14 tifying interest points and their full connected paths as driving distances, and
15 times. We could think of edge-based algorithms such as building a spanning
16 tree, but the restriction of the algorithm, of nodes connected without cycles,
17 did not give a proper structure to build the intended network. Thus, we
18 opted for a heuristic based on winner-takes-all approach.

19
20
21
22 Two requirements must be met to prototype a transportation system:

- 23 1. a foundational structure, such as a city street network, generally rep-
24 resented as a grid
- 25 2. a traffic flow model.

26
27
28 OSMnx produces a graph $\mathcal{G} = (\mathcal{N}, \mathcal{E})$, where the nodes \mathcal{N} corresponds
29 to the interest points and the edges \mathcal{E} to the paths (streets) connecting the
30 interest points around the city. Quito street network was built using the
31 package Open Street Maps in Python [39]. The edge length was used as a
32 criterion for trimming the extracted network. The graph \mathcal{G} can be represented
33 as the adjacency matrix D , where elements smaller than the 75th percent,
34 $d_{ij} < p_{75th}$, become zero. The **OD** matrix is summarized at the node level,
35 where the node degree is expressed as:

$$36 \quad x_a^{tot} = x_k^{in} + x_k^{out} \quad (1)$$

37
38
39
40
41 with:

$$42 \quad x_k^{in} = \sum_j f_{ij} \quad (2)$$

43
44
45
46 and:

$$47 \quad x_k^{out} = \sum_j f_{ji} \quad (3)$$

48
49
50 where x_k^{in} is the time flow indegree, x_k^{out} the time flow outdegree, and x_k^{tot}
51 x_k^{tot} measures the traffic flow of each point that is a candidate for the
52 placement
53 of charging station k .

1
2
3
4
5
6
7
8
9 *2.2. Problem Formulation*

10 It is possible to obtain a large number of N_K candidate charging stations.
11 The number of charging spots n_k is defined as a decision variable for each
12 ET charging station k . For each charging station, the search space for the
13 number of charging locations was examined, and optimization was performed.
14 The goal is to minimize the cost of establishing public charging stations for
15 electric vehicles. The cost of ET travel is included in the overall price as
16 it is a significant incentive for taxi drivers to use EVs. For each charging
17 station, a typical fixed installation cost, land cost, and trip cost are defined,
18 representing the overall cost to be modeled for the charging station size.

$$23 \quad C_k = C_k^{rit} + C_k^l + C_k^{tr} \quad (4)$$

24 As each interest point is located in a different zone with different land
25 prices, the land cost is a variable.

26 The installation cost is assumed to be:

$$27 \quad C_k^{rit} = C^m + C^w \quad (5)$$

28 The fixed costs are represented by the two terms. The first term refers
29 to material costs, including the price of the electric equipment and charging
30 stations. The second term refers to workers responsible for constructing
31 parking lots with charging stations.

32 The work includes a trip cost because the transportation needs of taxi
33 drivers must be considered to incentivize the purchase of ETs. For each
34 charging station k , the travel cost is a variable term defined as:

$$35 \quad C_k^{tr} = \omega \cdot DT_k \quad (6)$$

36 The objective is to minimize the sizing costs of the ET charging stations
37 formulated as Eq. (7):

$$38 \quad \min C = \min \sum_{k \in \mathcal{K}} C_k \quad (7)$$

39 Subject to:

$$40 \quad \underline{Q}_k \leq Q_k \leq \overline{Q}_k \quad (8)$$

$$41 \quad \underline{V}_k \leq V_k \leq \overline{V}_k \quad (9)$$

$$|I_k| \leq \bar{I}_k \quad (10)$$

$$n_k \cdot \bar{P}_{ch} \leq P_s^F \quad (11)$$

$$\underline{N}_{ch} \leq n_k \leq \bar{N}_{ch} \quad (12)$$

$$\sum_{k \in \mathcal{K}} n_k \cdot P_{ch} \cdot \eta \cdot T \geq E_{req} \quad (13)$$

$$n_{k+1} - n_k \leq \beta \cdot \Delta D_{k,k+1} \quad (14)$$

Constraint (8) represents the lower and upper limits of reactive power necessary for compensation at charging station k . Constraint (9) imposes the lower and upper voltage limits at each bus i . Constraint (10) imposes the lower and upper voltage limits at each bus k , guaranteeing the maximal current limits in each feeder. The electrical substation capacity limit of each charging station k belonging to substation $s \in \mathcal{S}$ is imposed by constraint (11). The minimum and maximum number of charging spots in each charging station are defined by constraint (12). During the time range in which taxi drivers are free to stop and charge their EVs, constraint (13) ensures that all charging stations can supply the total required energy for all taxi drivers. Constraint (14) is a ramp-up limit between each charging station, suggesting that there should be a maximum difference between charging stations for the shortest driving distance to discourage taxi drivers from going long distances if all charging station spots are used.

Mixed-integer linear optimization can be used to address this problem. Active and reactive power limits for each charging station represent the power flows that can occur at a bus or node in a network. As the time-series loading data for substations and the conductor parameters were not available, an alternative approach to the T&D network load flow was used. A power flow only provides the minimum and maximum voltage values for one year at the sub-station end and not at the node. The voltage at a node can be obtained by accounting for the voltage drop (along its length) from the substation voltage:

$$V_k = V_{SS} - V_D \quad (15)$$

1
2
3
4
5
6
7
8
9 However, the total load at each node was not available for evaluating the
10 current for ET charging.

11 Accordingly, a substation loading analysis was performed to calculate the
12 minimum and maximum power at each node. It was assumed that each
13 substation could be loaded to 80% of its rated capacity. Further, based on
14 land price, the substations were considered loaded to 50% or 70% of their
15 capacity. In prime locations, with prices exceeding 600 \$/m², substations are
16 more heavily loaded; it is safe to assume a practical maximum loading limit
17 of 70%. For all other substations with locations in less economically active
18 zones, their operating limit was assumed to be 50% of their capacity. As
19 each substation is sized to serve either one, two, or three types of consumers,
20 industrial, residential, and commercial, EV charging must increase loading
21 beyond the safe limits. Thus:
22
23
24
25

$$\sum_{k \in \mathcal{K}} n_k P_{ch} \eta < P_s^F \quad (16)$$

26
27
28
29 Accordingly, the minimum and maximum space for EV loading were con-
30 sidered to be an additional load of 5–15%. Thus, for 66 MVA substations,
31 which are primarily residential, a minimum of 5% of the rated capacity can
32 be accommodated as the EV charging load. A maximum EV charging load
33 corresponding to 15% of the rated capacity was allowed. For other large
34 substations, 75–80% of the rated capacity was used as the operating limit
35 considering EV charging in addition to other loads. A practical assessment
36 of substation loading and distribution of EV charging load was conducted to
37 model the power flow constraints.
38
39
40

41 The methodology can be summarized by the following pseudocode:
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Data: Network, Traffic flow, Power grid parameters
Set cost variables;

Result: Optimal siting based on interest points

Process

City network and traffic flow based on winner takes all edge trimming and minimum traffic flow;

Define cost function Set power grid conditions based on interest points in the city;

Minimize cost function subject to constraints;

Obtain optimal sizing for each charging station at minimum investment cost;

Perform sensitivity analysis considering monetary value time and resource weighted leveraging ;

Algorithm 1: Siting and sizing process

3. Case Study and Assumptions

A case study of Quito, Ecuador was chosen based on the mayor’s commitment to gradually replace internal combustion taxis with EVs. Quito is located 2,800 m above sea level; automobile combustion is inefficient as a result of the high altitude, resulting in considerable pollution issues. As taxis are a large source of traffic and noise, the mayor must provide other modes of transportation.

3.1. Potential locations of ET charging stations

The urban traffic flow mapping in Quito was completed in a previous study [40]; numerous prospective ET charging stations were chosen.

The city can be modeled as a street network [41], as a weighted multi-graph $\mathcal{G} = (\mathcal{N}, \mathcal{E}, \mathcal{W})$. A graph is a set of nodes \mathcal{N} interconnected by a set of edges \mathcal{E} which are weighted connections with weights \mathcal{W} . Each vertex $n_i \in \mathcal{N}$, corresponds to an interest point in the city, and is embedded with its geographical position. Each edge $e_i \in \mathcal{E}$, corresponds to the streets, avenues, and highways, with an embedded a geometry, indicated by a vector representing its geographic spatial component. An edge can be defined as the ordered tuple $e_i = (n_i, n_j)$ connecting nodes n_i and n_j . The Python

OSMnx library was used for extraction and modeling of the street network of Quito. OSMnx is a Python package that allows geospatial data to be downloaded from OpenStreetMap to model, project, visualize, and analyze real-world street networks and other geospatial geometries [38].

Once the city street network substrate has been defined, traffic flow information must be obtained. The Google Distance Matrix API was used to extract real-time traffic data from one vertex v_i to its connected neighbors in the street network [40]. The Google Distance Matrix API provides the travel distance and time based on the recommended driving route e_k between two vertices $e_k = (n_i, n_j)$. The extracted driving distance and driving time define the weight of the street edge e_k , and can be represented as the unordered tuple $w_k = (d_{ij}, f_{ij}) = (\textit{driving_distance}, \textit{driving_time})$. Requests are made to the Google Distance Matrix API, providing the start and end points corresponding to the origin n_i and destination n_j nodes for each connection in the city street network. Registers for traffic and flows record data with the following structure: Each register, for the traffic, flows, records the data with the following structure:

```
from(latitude, longitude),  
to(latitude, longitude),  
mean_time,  
mean_distance.
```

The extracted data for the edge weights of the edges, can be summarized as described in Eq. 1; the weight times f_{ij} are used to model the incoming and outgoing flows for each node.

In this study, 25 candidate locations were selected based on their minimum average time, according to the explanation at the beginning of Section II. The number of locations must be considered for geographically dispersed charging stations in the city; installing too many charging spots in the same station could lead to grid issues. Figure 2-left shows the 25 candidates for EV charging stations in blue, and the electrical substations in red, located in the north center of Quito. A fully connected graph for the 25 selected locations was built using the driving traffic distances extracted from the Google API.

Figure 2-right shows the Hamiltonian cycle connecting the ten selected charging stations. A Hamiltonian cycle visits each node only once, and reduces the overall driving distance. Each site has a distinct land cost. Table

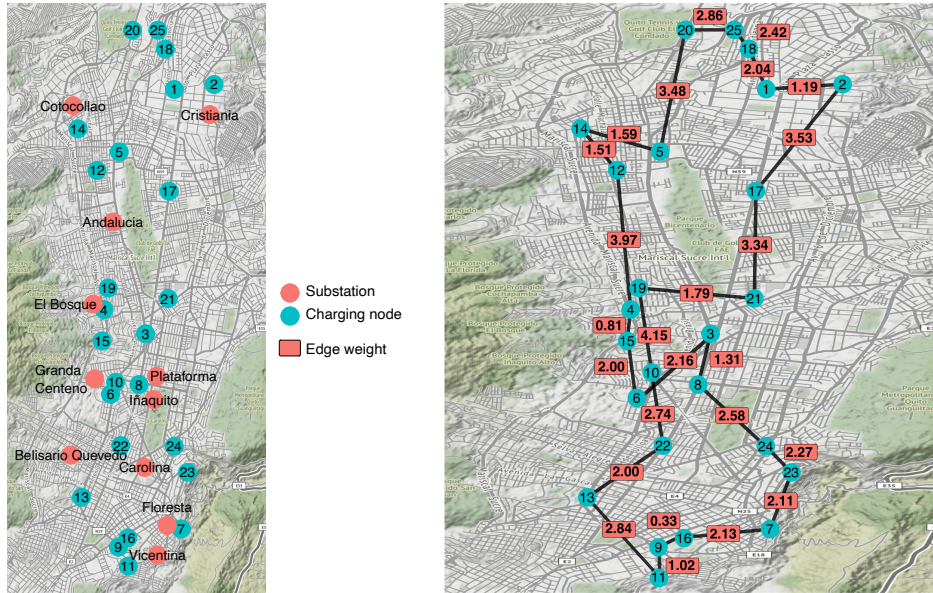


Figure 2: Left panel: potential locations of electrical substations and charging stations in the city of Quito. Right panel: potential locations of charging stations and Hamiltonian cycle connecting them.

1 summarizes the sites of interest with the shortest flow time, the associated land costs, and the nearest substation capacity. The land costs were obtained from local property sales company [42]. The power grid data was obtained based on the local electricity distribution company, which is Empresa El ´ectrica Quito [43], and from the Ecuadorian Regulatory company, which is Arconel [44].

3.2. ET Charging Parameters

After identifying the potential locations of ET charging stations, the number of charging spots at each charging station was calculated. To this end, the daily peak load and daily required energy for the ETs were estimated. A practical estimation approach for arrival of ETs at charging stations is presented, based on accurate data from taxi driver travel behavior, which differs significantly from that of typical drivers. As taxi drivers drive much longer distances than a typical driver, they experience more range anxiety. Hence, the arrival time depends on the state of charge (*SOC*) of the ET, determined based on the travel distance as per reference [45]. The arrival process at the charging stations is described as a Markovian queuing system.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 1: Interest points with minimum flow time selected as pre-feasibility stations.

node	mean time (min)	land cost (\$/m ²)	substation capacity (MW)
1	6.44	600	66
2	7.03	600	66
3	11.07	780	20
4	11.72	780	20
5	11.67	780	20
6	10.42	950	20
7	11.76	2000	40
8	10.76	780	20
9	10.62	1200	200
10	10.01	1300	200
11	10.80	1300	200
12	9.07	1200	20
13	11.99	2000	20
14	12.11	2000	40
15	9.75	2000	10
16	7.94	1400	10
17	8.48	1130	20
18	10.78	1400	20
19	8.41	780	20
20	10.75	780	20
21	10.77	780	166
22	8.43	780	166
23	11.67	600	166
24	12.29	600	66
25	11.58	600	66

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

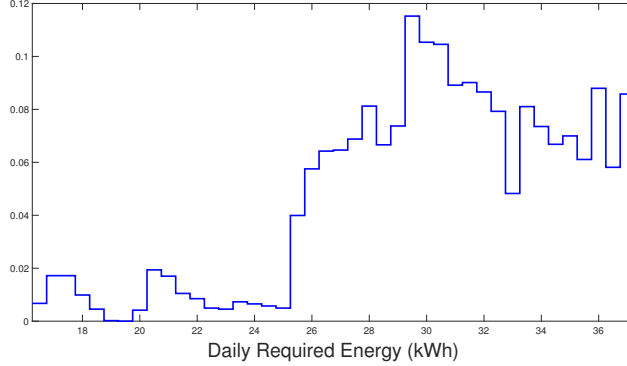


Figure 3: Histogram of the daily required energy for ETs [46]

The system is defined as MMCK per the Kendall notation. The inter-arrival (M) and service times (M) are exponential; arrival is governed by a Poisson process, with C servers and queue capacity K , the maximum number of EVs that can be accommodated in the servers.

There are 8,633 taxis in Quito. With so few ETs in Quito, charging behavior must be analyzed to provide a charging load curve for optimal charging station sizing. To that end, GPS data from driving behavior were gathered from taxi drivers in Quito [46]. A gasoline-to-electricity conversion rate is used to divide the required electricity energy by the number of taxis, resulting in an average required energy of 30.35 kWh per taxi. For simplicity the value is rounded to nearest integer of an average of 30 kWh per taxi. The histogram of the daily required energy for ETs is illustrated in Figure 3. The average required energy was calculated from Figure 3

Most taxi drivers take a break from 3–8 p.m., after lunch, and when there are few clients. This will result the time horizon. Based on the previously traveled distance, 50% of the required energy should be delivered during these periods, which is when the assumed peak load is observed, and corresponds to an E_{av} of 15 kWh. The other 50% will be delivered at night in taxi drivers homes, which is not considered in this study. Thus, the energy required in Eq. (13) results in:

$$E_{req} = \sum_{v \in \mathcal{V}} v \cdot E_{av} \quad (17)$$

A few ETs have been purchased in Quito and other Ecuadorian cities;

Table 2: System Parameters for Case Study

Parameter	Value
Number of taxis N_v	8633
Time horizon T for charging ETs [h]	5
Spot charging power P_{ch} [kW]	22
Charging efficiency of charging spot η [%]	0.9
Maximum number of charging spots \overline{N}_{ch}	40
Minimum number of charging spots \underline{N}_{ch}	5
Daily electricity required by ET E_{av} [kWh]	15
Assumed land used for an individual parking lot [m ²]	20
Monetary value of travel time ω	3,500
Weighted resource leveling β	10

the BYD e5 model was chosen to represent the taxi driver demographic [47]. This EV has a charging power of $P_{ch}=22$ kW; the charging efficiency η was assumed to be 90 % [48].

Based on quotes, the fixed investment cost of each charging location, including materials and labor, is estimated to be \$ 3000 [42]. The surface area of the land used for each parking lot was assumed to be 20 m².

The minimum number of spots n_k in each charging station k is considered to be five, and the maximum is 40 The monetary value of travel time ω is considered to be 3,500, and the weighted resource leveling β is considered to be 10. In Table 2, the system parameters for case study are summarized.

3.3. Stakeholders involved

The proposed methodology for the siting and sizing of ET charging stations is relevant to the different nature of stakeholders involved. For public nature stakeholders, such as the city hall and state government, because this study facilitates the introduction of ETs in the community stimulating green and climate change policies in the area in which they are interested and are currently investing. For private nature, there are different stakeholders to consider. For zone distributors, the optimization of the charging station facilitates the use of the distribution network, avoiding pressures to enlarge the electrical local network to face the increment in the electrical load due to the

1
2
3
4
5
6
7
8
9 introduction of ETs. For traders, it enables the consumption and the incre-
10 ment of business because of the new energy consumption, especially in hours
11 with an actual lower consumption (nights and weekends) for ETs stimulated
12 by new tariffs that may be proposed. Finally, taxi companies, because can
13 move to electrical technology with lower exploitation costs and lower CO2
14 penalties that public entities are introducing, especially in the center of the
15 cities. Some of the new stations may be installed with private funds directly
16 by the taxi companies.
17
18

19 3.4. Model Simulation

20 Eqs. (7)-(14) represent the sizing model corresponding to a mixed-integer
21 nonlinear programming (MINLP) problem. To avoid a complex formulation,
22 the problem can be decomposed into two subproblems. The decoupled prob-
23 lem starts with constraints (8)-(10), obtaining a maximum power constraint
24 that can be delivered to each charging station, and then to constraints (11)-
25 (14), which are mainly logistic and transportation constraints.
26
27

28 In this study, GAMS 33.1.0 with CPLEX performed the simulations of
29 the proposed MILP model using an Intel Core i7-8700 with 32 GB of RAM
30 [49].
31

32 When solving mixed integer programming (MIP) models, CPLEX em-
33 ploys branch-and-cut search. The branch-and-cut process handles a node-
34 based search tree. Every node represents a linear programming (LP) or
35 quadratic programming (QP) subproblem to be processed, that is, solved,
36 tested for integrality, and maybe further studied. CPLEX continues to pro-
37 cess active nodes in the tree until there are no more active nodes available or a
38 limit is reached. The formation of two new nodes from a parent node is
39 referred to as a branch. A branch happens when the boundaries on a single
40 variable are changed, and the new bounds apply to that new node as well as
41 any of its descendants. A cut is an additional constraint to the model. The
42 goal of adding any cut is to reduce the size of the solution domain for contin-
43 uous LP or QP problems represented at the nodes while leaving legal integer
44 solutions in place. As a result, the number of branches necessary to solve the
45 MIP is reduced. [50]. Solving MILP problems necessitates significantly more
46 numerical calculation than solving comparably sized pure linear problems.
47 The solution of simple integer problems takes an inordinate amount of time.
48 [49].
49
50
51
52
53
54
55
56
57
58

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

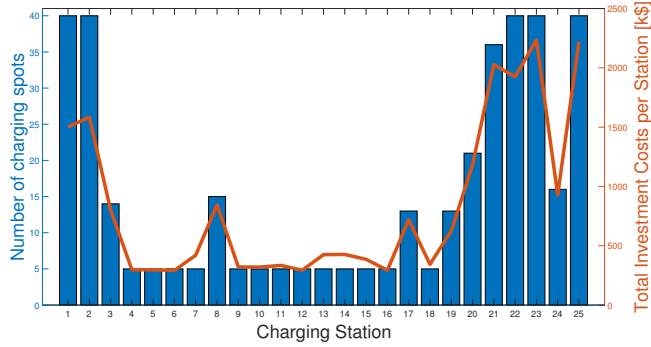


Figure 4: Number of charging spots and costs for an ET penetration level of 30%.

4. Results and discussion

Three scenarios were investigated, with different amounts of EV penetration (30%, 40%, and 50%).

4.1. Number of charging spots and costs

For an ET penetration of 50%, the total number of charging spots and the associated expenses are presented in Table 3.

As the land cost is high, the station with the fewest charging spots is Station 14, with eight charging spots. The maximum number of charging spots is reached at stations with the lowest land cost.

The number of charging spots to be installed and the total investment costs for each charging station for ET penetration of 30%, 40%, and 50% are illustrated in Figures 4, 5, and 6, respectively. With 30% ET penetration, several charging stations reach their charging spot number or power limit. A total of 393, 524, and 654 charging spots must be constructed for ET penetration levels of 30%, 40%, and 50%, respectively.

Table 4 summarizes the investment costs for ET penetration of 30%, 40%, and 50%. Between ET penetration of 30% and 50%, fixed costs increase by 40%, land costs by 93%, and trip costs by 72%.

Figures 7, 8, and 9 show the investment costs per station for ET penetration of 30%, 40%, and 50%, respectively. The most significant costs are land and trip costs.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 3: EV characteristics

Station	Number	Cost
1	40	1244.5
2	40	1302.8
3	17	786.6
4	17	814.3
5	21	1003.4
6	21	1008.9
7	40	2895.5
8	17	773.6
9	40	2142.4
10	34	1836.5
11	40	2239.6
12	21	1043.1
13	21	1532.6
14	8	586.2
15	10	673.8
16	10	508.5
17	21	983.0
18	21	1216.7
19	17	673.5
20	21	954.9
21	17	774.1
22	40	1587.4
23	40	1767.5
24	40	1829.4
25	40	1758.1
Total	654	31936.8

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

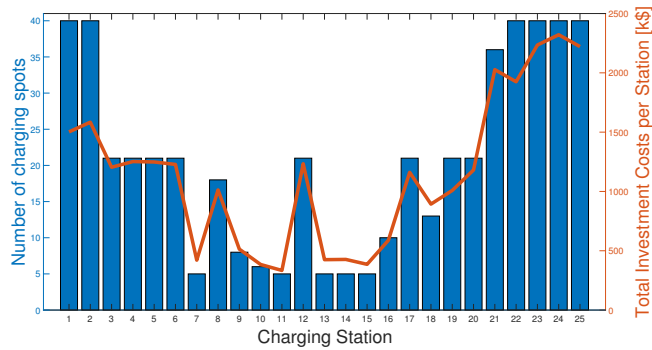


Figure 5: Number of charging spots and costs for an ET penetration level of 40%.

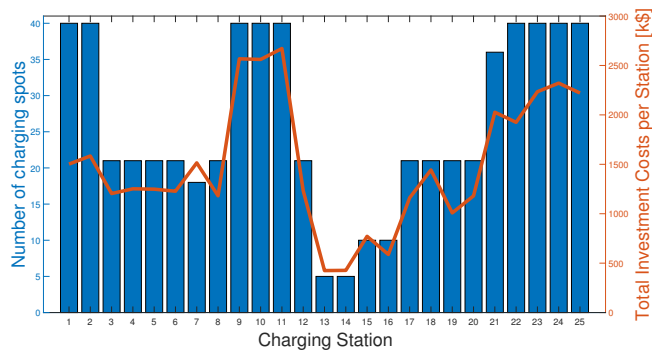


Figure 6: Number of charging spots and costs for an ET penetration level of 50%.

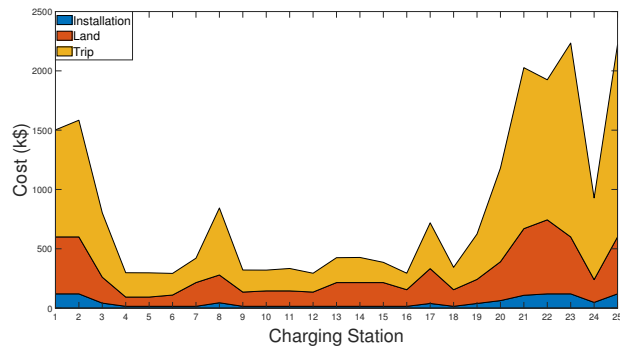


Figure 7: Investment costs for an ET penetration level of 30%.

4.2. Sensitivity Analysis

A sensitivity analysis was performed for the monetary value of trip time ω and weighted resource leveling β to address uncertainties concerning prob-

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 4: Summary of the various investment costs for different ET penetration levels

ET penetration (%)	30	40	50
Fixed costs (k\$)	1,179	1,572	1,962
Land costs (k\$)	6,405	8,804	12,357
Trip costs (k\$)	13,460	18,339	23,162
Total costs (k\$)	21,045	28,715	37,481

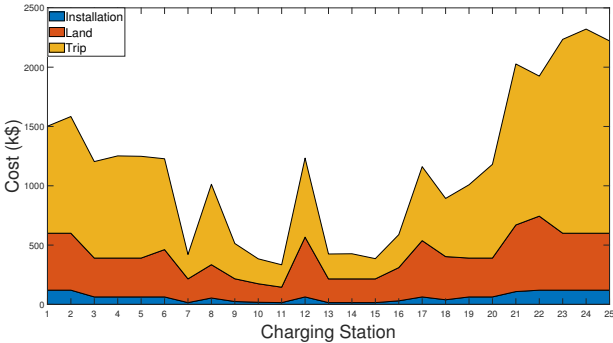


Figure 8: Investment costs for an ET penetration level of 40%.

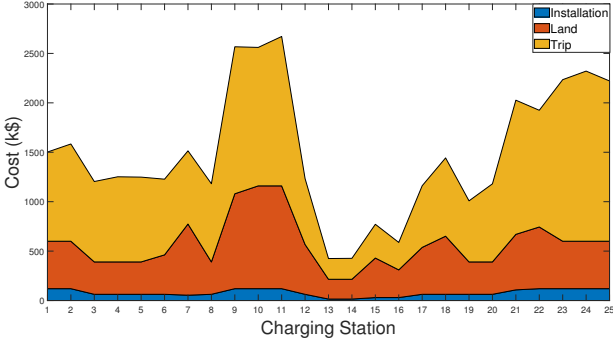


Figure 9: Investment costs for an ET penetration level of 50%.

able travel expenses and restrictions. Parameter β was varied from 5 to 15 in increments of 0.2. Parameter ω was varied from 2,000 to 5,000 in 60 increments.

The surface plots of land costs and total investment costs for an ET penetration of 30% are shown in Figures 10 and Figure 11, respectively.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

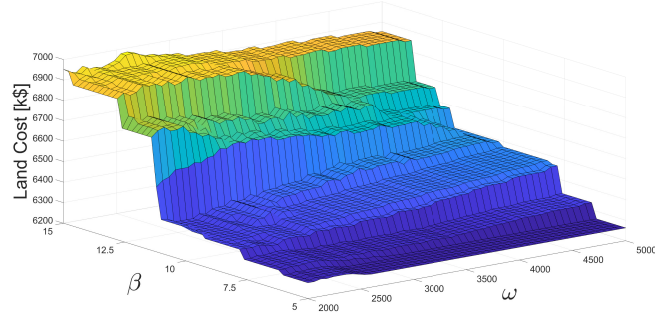


Figure 10: Investment costs depending on β and ω .

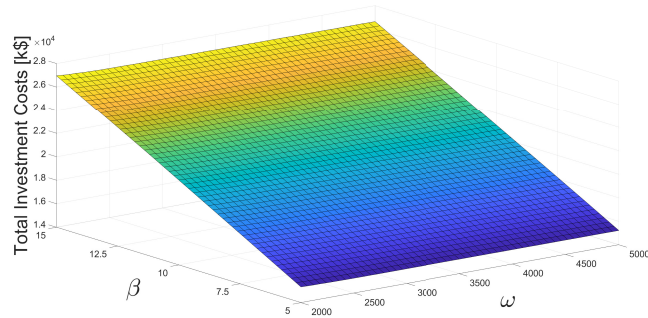


Figure 11: Total investment costs depending on β and ω .

It is observed that land costs vary substantially, especially with variations in the weighted resource leveling β . The surface plot of the total costs is relatively flat; variation in the monetary value of travel time ω does not lead to a change in costs. However, an increase in the weighted resource leveling β leads to an increase in costs.

4.3. Discussion

The optimal siting and sizing of various kinds of EVs is a topic that need to been significantly investigated for the proper integration of EVs in power systems and the diffusion of market sales. Some works such as [25; 26; 27; 28; 29; 30; 31] have already considering both the power and traffic constraints and present robust methodologies. However, this paper presents a new way of reducing traffic jams by considering winner takes all methodology. In

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

addition, the particular time schedules and time rigidity of taxi drivers have been considered. With this proper planning of ET charging stations, this will result in a higher adoption and sales of EVs for public transportation.

To achieve reduction in emissions in transportation, it not sufficient to electrify various fleets, but the electricity should originate from renewable generation. In Ecuador there was a large investment in renewable generation based on hydroelectricity in the 2007-2017 decade. In 2018, 72.58% of the total produced electricity was from renewable energy, from which 97.47% is from hydroelectricity, 1.8% from Biomass, 0.18% from solar PV, 0.38% from wind, and 0.21% from bio-gas [51]. Thus, Ecuador is a country that has a strong potential to reduce its global emissions in transportation by shifting to electric mobility, and it is crucial to have policies for investing in public charging stations such as for ETS.

5. Conclusions

Optimal siting and sizing of ET charging stations are determined in this study to minimize total charging costs, considering transportation and power system restrictions. The city of Quito, Ecuador was investigated as a case study. The total costs include installation costs, land costs, and trip costs. A network modeling approach based on a winner-takes-all edge trimming was used to identify interest points of the city in terms of traffic flows, and 25 prospective ET charging stations were identified. The driving behavior of taxi drivers in Quito was also considered.

The findings indicate the number of charging spots that should be installed in each station. A higher number of charging spots to be installed was observed in the charging stations with lower land costs. A sensitivity study was also performed to address parameter variability in the proposed model.

Acknowledgements

This study is part of the Universidad de las Américas-project Ecuador, SIS.JCG.19.03. The authors would like to express their gratitude to Irvin Cedeño of BYD E-Motors Ecuador for helpful information.

References

- [1] K. P. Wenz, X. Serrano-Guerrero, A. Barragán-Escandón, L. G. González, J. M. Clairand, Route prioritization of urban public transportation from conventional to electric buses: A new methodology and a study of case in an intermediate city of Ecuador, *Renew. Sustain. Energy Rev.* 148 (December 2020) (2021). doi:10.1016/j.rser.2021.111215.
- [2] J.-M. Clairand, P. Guerra-Terán, X. Serrano-Guerrero, M. González-Rodríguez, G. Escrivá-Escrivá, Electric Vehicles for Public Transportation in Power Systems: A Review of Methodologies, *Energies* 12 (16) (2019) 3114. doi:10.3390/en12163114.
- [3] K. Clement-Nyns, E. Haesen, J. Driesen, The impact of Charging plug-in hybrid electric vehicles on a residential distribution grid, *IEEE Trans. Power Syst.* (2010). doi:10.1109/TPWRS.2009.2036481.
- [4] S. Deilami, A. S. Masoum, P. S. Moses, M. A. S. Masoum, Real-time coordination of plug-in electric vehicle charging in smart grids to minimize power losses and improve voltage profile, *IEEE Trans. Smart Grid* (2011). doi:10.1109/TSG.2011.2159816.
- [5] L. G. González, E. Siavichay, J. L. Espinoza, Impact of EV fast charging stations on the power distribution network of a Latin American intermediate city, *Renew. Sustain. Energy Rev.* 107 (June 2018) (2019) 309–318. doi:10.1016/j.rser.2019.03.017.
URL <https://doi.org/10.1016/j.rser.2019.03.017>
- [6] Ö. Gönül, A. C. Duman, Ö. Güler, Electric vehicles and charging infrastructure in Turkey: An overview, *Renew. Sustain. Energy Rev.* 143 (August 2020) (2021). doi:10.1016/j.rser.2021.110913.
- [7] A. Shukla, K. Verma, R. Kumar, Voltage-dependent modelling of fast charging electric vehicle load considering battery characteristics, *IET Electr. Syst. Transp.* 8 (4) (2018) 221–230. doi:10.1049/iet-est.2017.0096.
- [8] X. Shi, Y. Xu, Q. Guo, H. Sun, W. Gu, A Distributed EV Navigation Strategy Considering the Interaction Between Power System and Traffic Network, *IEEE Trans. Smart Grid* 11 (4) (2020) 3545–3557. doi:10.1109/tsg.2020.2965568.

- 1
2
3
4
5
6
7
8
9 [9] W. Gan, M. Shahidehpour, M. Yan, J. Guo, W. Yao, A. Paaso, L. Zhang,
10 J. Wen, Coordinated Planning of Transportation and Electric Power
11 Networks with the Proliferation of Electric Vehicles, *IEEE Trans. Smart*
12 *Grid* 3053 (c) (2020) 1–1. doi:10.1109/tsg.2020.2989751.
13
14
15 [10] A. Pahlavanhoseini, M. S. Sepasian, Optimal planning of PEV fast
16 charging stations using an auction-based method, *J. Clean. Prod.* 246
17 (2020) 118999. doi:10.1016/j.jclepro.2019.118999.
18 URL <https://doi.org/10.1016/j.jclepro.2019.118999>
19
20
21 [11] C. A. Marino, M. Marufuzzaman, Unsupervised learning for de-
22 ploying smart charging public infrastructure for electric vehi-
23 cles in sprawling cities, *J. Clean. Prod.* 266 (2020) 121926.
24 doi:10.1016/j.jclepro.2020.121926.
25 URL <https://doi.org/10.1016/j.jclepro.2020.121926>
26
27
28 [12] P. Sadeghi-Barzani, A. Rajabi-Ghahnavieh, H. Kazemi-Karegar, Opti-
29 mal fast charging station placing and sizing, *Appl. Energy* 125 (2014)
30 289–299. doi:10.1016/j.apenergy.2014.03.077.
31 URL <http://dx.doi.org/10.1016/j.apenergy.2014.03.077>
32
33
34 [13] Y. Zhao, Y. Guo, Q. Guo, H. Zhang, H. Sun, Deployment of the Elec-
35 tric Vehicle Charging Station Considering Existing Competitors, *IEEE*
36 *Trans. Smart Grid* 3053 (c) (2020) 1–1. doi:10.1109/tsg.2020.2991232.
37
38
39 [14] C. Li, L. Zhang, Z. Ou, Q. Wang, D. Zhou, J. Ma, Robust
40 model of electric vehicle charging station location considering re-
41 newable energy and storage equipment, *Energy* 238 (2022) 121713.
42 doi:10.1016/j.energy.2021.121713.
43 URL <https://doi.org/10.1016/j.energy.2021.121713>
44
45
46 [15] A. Aljanad, A. Mohamed, H. Shareef, T. Khatib, A novel method
47 for optimal placement of vehicle-to-grid charging stations in distri-
48 bution power system using a quantum binary lightning search al-
49 gorithm, *Sustain. Cities Soc.* 38 (December 2017) (2018) 174–183.
50 doi:10.1016/j.scs.2017.12.035.
51 URL <https://doi.org/10.1016/j.scs.2017.12.035>
52
53
54 [16] M. Asna, H. Shareef, P. Achikkulath, H. Mokhlis, R. Errouissi,
55 A. Wahyudie, Analysis of an Optimal Planning Model for Electric Vehi-
56
57
58

1
2
3
4
5
6
7
8
9 cle Fast-Charging Stations in Al Ain City, United Arab Emirates, IEEE
10 Access 9 (2021) 73678–73694. doi:10.1109/ACCESS.2021.3081020.
11

- 12 [17] N. Shahraki, H. Cai, M. Turkay, M. Xu, Optimal locations of elec-
13 tric public charging stations using real world vehicle travel patterns,
14 Transp. Res. Part D Transp. Environ. 41 (2015) (2015) 165–176.
15 doi:10.1016/j.trd.2015.09.011.
16 URL <http://dx.doi.org/10.1016/j.trd.2015.09.011>
17
- 18 [18] Y. Zhang, Y. Wang, F. Li, B. Wu, Y.-Y. Chiang, X. Zhang, Effi-
19 cient Deployment of Electric Vehicle Charging Infrastructure: Simul-
20 taneous Optimization of Charging Station Placement and Charging
21 Pile Assignment, IEEE Trans. Intell. Transp. Syst. (Mcl) (2020) 1–6.
22 doi:10.1109/tits.2020.2990694.
23
- 24 [19] S. Micari, A. Polimeni, G. Napoli, L. Andaloro, V. Antonucci,
25 Electric vehicle charging infrastructure planning in a road net-
26 work, Renew. Sustain. Energy Rev. 80 (March) (2017) 98–108.
27 doi:10.1016/j.rser.2017.05.022.
28 URL <http://dx.doi.org/10.1016/j.rser.2017.05.022>
29
- 30 [20] Q. Liu, J. Liu, W. Le, Z. Guo, Z. He, Data-driven intelligent location of
31 public charging stations for electric vehicles, J. Clean. Prod. 232 (2019)
32 531–541. doi:10.1016/j.jclepro.2019.05.388.
33 URL <https://doi.org/10.1016/j.jclepro.2019.05.388>
34
- 35 [21] L. Jia, Z. Hu, Y. Song, Z. Luo, Optimal siting and sizing of electric
36 vehicle charging stations, in: 2012 IEEE International Electric Vehicle
37 Conference, IEEE, 2012, pp. 1–6.
38
- 39 [22] A. Król, G. Sierpiński, Application of a genetic algorithm with a fuzzy
40 objective function for optimized siting of electric vehicle charging devices
41 in urban road networks, IEEE Transactions on Intelligent Transporta-
42 tion Systems (2021).
43
- 44 [23] G. Zhou, Z. Zhu, S. Luo, Location optimization of electric vehicle charg-
45 ing stations: Based on cost model and genetic algorithm, Energy 247
46 (2022) 123437. doi:10.1016/j.energy.2022.123437.
47 URL <https://doi.org/10.1016/j.energy.2022.123437>
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1
2
3
4
5
6
7
8
9 [24] A. Al Wahedi, Y. Bicer, Techno-economic optimization of novel stand-
10 alone renewables-based electric vehicle charging stations in Qatar,
11 *En-ergy* 243 (2022) 123008. doi:10.1016/j.energy.2021.123008.
12 URL <https://doi.org/10.1016/j.energy.2021.123008>
13
14
15 [25] X. Wang, M. Shahidehpour, C. Jiang, Z. Li, Coordinated Planning
16 Strategy for Electric Vehicle Charging Stations and Coupled Traffic-
17 Electric Networks, *IEEE Trans. Power Syst.* 34 (1) (2019) 268–279.
18 doi:10.1109/TPWRS.2018.2867176.
19
20
21 [26] W. Kong, Y. Luo, G. Feng, K. Li, H. Peng, Optimal location planning
22 method of fast charging station for electric vehicles considering opera-
23 tors, drivers, vehicles, traffic flow and power grid, *Energy* 186 (2019)
24 115826. doi:10.1016/j.energy.2019.07.156.
25 URL <https://doi.org/10.1016/j.energy.2019.07.156>
26
27
28 [27] M. Mainul Islam, H. Shareef, A. Mohamed, Optimal location and siz-
29 ing of fast charging stations for electric vehicles by incorporating traffic
30 and power networks, *IET Intell. Transp. Syst.* 12 (8) (2018) 947–957.
31 doi:10.1049/iet-its.2018.5136.
32
33
34 [28] H. Lin, C. Bian, Y. Wang, H. Li, Q. Sun, F. Wallin, Optimal plan-
35 ning of intra-city public charging stations, *Energy* 238 (2022) 121948.
36 doi:10.1016/j.energy.2021.121948.
37 URL <https://doi.org/10.1016/j.energy.2021.121948>
38
39
40 [29] A. Shukla, K. Verma, R. Kumar, Multi-objective synergistic planning
41 of EV fast-charging stations in the distribution system coupled with
42 the transportation network, *IET Gener. Transm. Distrib.* 13 (15) (2019)
43 3421–3432. doi:10.1049/iet-gtd.2019.0486.
44
45
46 [30] Z. Zhou, X. Zhang, Q. Guo, H. Sun, Analyzing power and dy-
47 namic traffic flows in coupled power and transportation networks,
48 *Renew. Sustain. Energy Rev.* 135 (March 2020) (2021) 110083.
49 doi:10.1016/j.rser.2020.110083.
50 URL <https://doi.org/10.1016/j.rser.2020.110083>
51
52
53 [31] A. Rajabi-Ghahnavieh, P. Sadeghi-Barzani, Optimal Zonal Fast-
54 Charging Station Placement Considering Urban Traffic Cir-culation,
55 *IEEE Trans. Veh. Technol.* 66 (1) (2017) 45–56. doi:10.1109/
56 TVT.2016.2555083.
57
58

- 1
2
3
4
5
6
7
8
9 [32] Q. Yang, S. Sun, S. Deng, Q. Zhao, M. Zhou, Optimal Sizing of PEV Fast Charging Stations with Markovian Demand Characterization, *IEEE Trans. Smart Grid* 10 (4) (2019) 4457–4466. doi:10.1109/TSG.2018.2860783.
- 10
11
12
13
14
15 [33] H. Parastvand, V. Moghaddam, O. Bass, M. A. S. Masoum, A. Chapman, S. Lachowicz, A Graph Automorphic Approach for Placement and Sizing of Charging Stations in EV Network Considering Traffic, *IEEE Trans. Smart Grid PP (Xx)* (2020) 1–1. doi:10.1109/tsg.2020.2984037.
- 16
17
18
19
20
21 [34] L. Cilio, O. Babacan, Allocation optimisation of rapid charging stations in large urban areas to support fully electric taxi fleets, *Appl. Energy* 295 (2021) 117072. doi:10.1016/j.apenergy.2021.117072.
22
23
24
25 URL <https://doi.org/10.1016/j.apenergy.2021.117072>
- 26
27 [35] X. Meng, W. Zhang, Y. Bao, Y. Yan, R. Yuan, Z. Chen, J. X. Li, Sequential construction planning of electric taxi charging stations considering the development of charging demand, *J. Clean. Prod.* 259 (2020) 120794. doi:10.1016/j.jclepro.2020.120794.
28
29
30
31
32 URL <https://doi.org/10.1016/j.jclepro.2020.120794>
- 33
34 [36] I. Morro-Mello, A. Padilha-Feltrin, J. D. Melo, A. Calviño, Fast charging stations placement methodology for electric taxis in urban zones, *Energy* 188 (2019). doi:10.1016/j.energy.2019.116032.
- 35
36
37
38
39 [37] J.-M. Clairand, M. Gonzalez-Rodriguez, R. Kumar, S. Vyas, G. Escrive-Escrive, Coordinated Siting and Sizing of Electric Taxi Charging Stations Considering Traffic and Power Systems Conditions, 2021 IEEE Madrid PowerTech, *PowerTech 2021* (2021). doi:10.1109/PowerTech46648.2021.9495003.
- 40
41
42
43
44
45
46 [38] G. Boeing, Osmnx: New methods for acquiring, constructing, analyzing, and visualizing complex street networks, *Computers, Environment and Urban Systems* 65 (2017) 126–139.
- 47
48
49
50
51 [39] G. Boeing, Osmnx: New methods for acquiring, constructing, analyzing, and visualizing complex street networks, *Computers, Environment and Urban Systems* 65 (2017) 126–139.
- 52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1
2
3
4
5
6
7
8
9 [40] M. Gonz´alez-Rodr´ıguez, J.-M. Clairand, K. Soto-Espinosa, J. Jaramillo-
10 Fuelantala, G. Escriv´a-Escriv´a, Urban traffic flow mapping of an
11 andean capital: Quito, ecuador, IEEE Access (2020).
12
13
14 [41] T. Sarkar, D. Sarkar, P. Mondal, Road network accessibility analysis
15 using graph theory and gis technology: a study of the villages of english
16 bazar block, india, Spatial Information Research 29 (3) (2021) 405–415.
17
18 [42] Plusvalia, Plusvalia.
19 URL <https://www.plusvalia.com/>
20
21 [43] E. E. Quito, Empresa El´ectrica
22 Quito. URL [http://](http://www.eeq.com.ec:8080/)
23 www.eeq.com.ec:8080/
24
25 [44] A. d. R. y. C. d. E. y. R. N. no Renovables, Agencia de Regulaci´on y
26 Control de Energ´ıa y Recursos Naturales no Renovables.
27 URL <https://www.controlrecursosyenergia.gob.ec/>
28
29 [45] X. Zhang, K. W. Chan, H. Li, H. Wang, J. Qiu, G. Wang, Deep-
30 Learning-Based Probabilistic Forecasting of Electric Vehicle Charging
31 Load With a Novel Queuing Model, IEEE Trans. Cybern. (2020) 1–
32 14doi:10.1109/tcyb.2020.2975134.
33
34
35 [46] F. Sarmiento-Delgado, J.-M. Clairand, P. Guerra-Ter´an, G. Escriv´a-
36 Escriv´a, Electric Vehicle Charging Load Prediction for Private
37 Cars and Taxis Based on Vehicle Usage Data, in: 2019 IEEE
38 Chil. Conf. Electr. Electron. Eng. Inf. Commun. Technol., 2019, pp.
39 1–6. doi:10.1109/chilecon47746.2019.8988007.
40
41
42 [47] El Universo, En tres provincias se concentra la mayor compra de carros
43 el´ectricos.
44 URL [https://www.eluniverso.com/noticias/2020/08/12/nota/](https://www.eluniverso.com/noticias/2020/08/12/nota/7939423/mercado-vehiculos-electricos-ecuador-2020)
45 [7939423/mercado-vehiculos-electricos-ecuador-2020](https://www.eluniverso.com/noticias/2020/08/12/nota/7939423/mercado-vehiculos-electricos-ecuador-2020)
46
47
48 [48] BYD, BYD E5 charging cost and time calculator.
49 URL <https://evcompare.io/la/cars/byd/byd-e5/charging/>
50
51
52 [49] GAMS, GAMS.
53 URL <https://www.gams.com/>
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

[50] IBM, Branch and cut in CPLEX.
URL <https://www.ibm.com/docs/en/icos/12.10.0?topic=cplex>

[51] MERNNR, Plan Maestro de Electricidad 2019-2027, MERNNR Minist. Energ´ia y Recur. No Renov. Energ´ia y Recur. No Renov. (2019) 390.
URL <https://www.rekursosyenergia.gob.ec/plan-maestro-de-electricidad/>