



LA1-UW24-x Column Loudspeakers



- ▶ Good speech intelligibility and background music reproduction
- ▶ For applications where directivity is important
- ▶ High sensitivity
- ▶ Swivel wall mounting bracket supplied as standard
- ▶ Finished in white or black
- ▶ MDF construction
- ▶ Complies with international installation and safety regulations

The LA1-UW24-x is a 24 W general-purpose cost-effective column loudspeaker for indoor use where beaming is desirable, such as places of worship, congress venues, meeting rooms and canteens. A swivel wall mounting bracket is supplied as standard. The column loudspeaker is available in the colors black and white.

Functions

The robust, solid MDF (Medium Density Fiber board) enclosures are covered with a durable, easy-to-clean vinyl in a choice of white or black. The ABS fronts are covered with fine woven cloth in matching color. These powerful column loudspeakers are fitted with four dual cone high sensitivity loudspeaker drivers.

Certifications and Approvals

All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures extra reliability under extreme conditions, leading to higher

customer satisfaction, longer operating life, and much less chance of failure or performance deterioration.


Safety

EN 60065


Installation/Configuration Notes

The column loudspeakers can be wall mounted using the standard supplied swivel bracket, allowing accurate positioning.


A convenient easy-to-use, 4-pole push-in terminal block is present on the rearside for on-site wiring. This terminal block has provision for power tapping on the 100 V matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter-power radiation (i.e. in 3 dB steps)

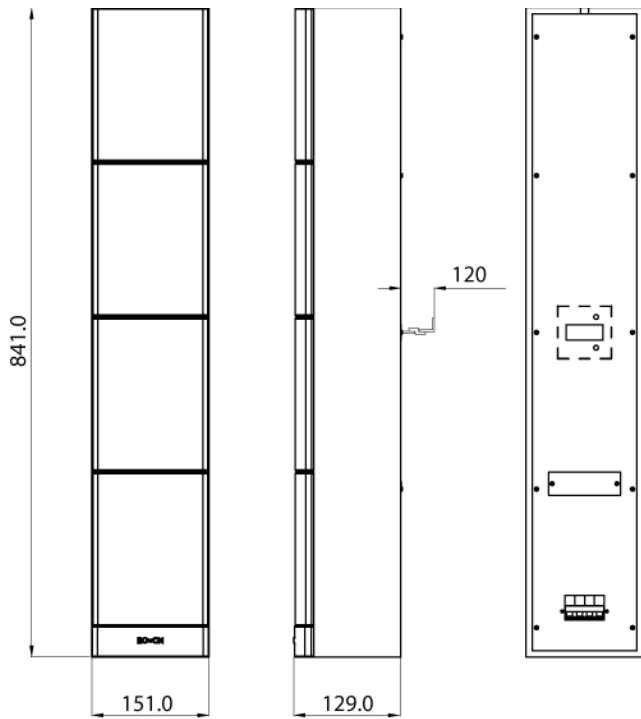


Dimensions in mm

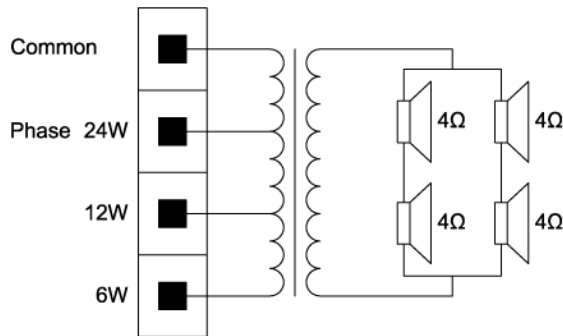


Circuit diagram

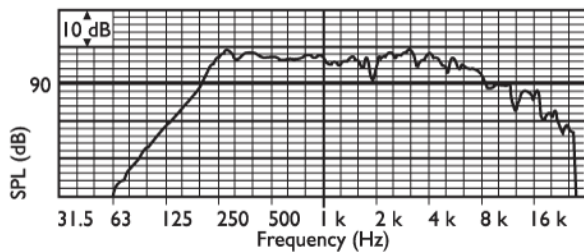

Frequency response

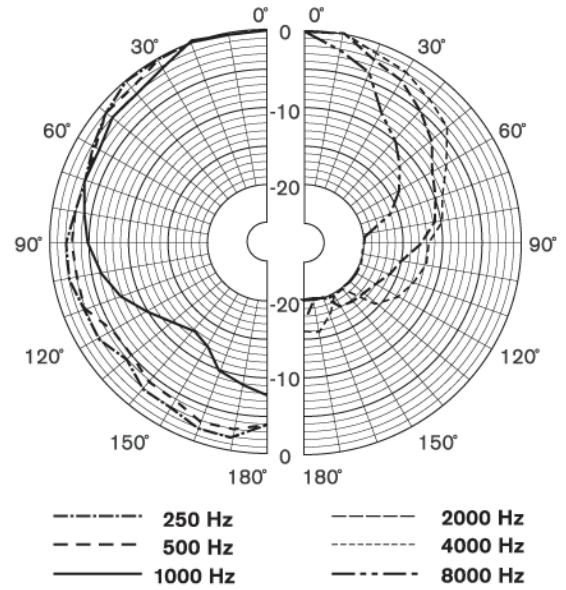

Polar diagram horizontal (measured with pink noise)

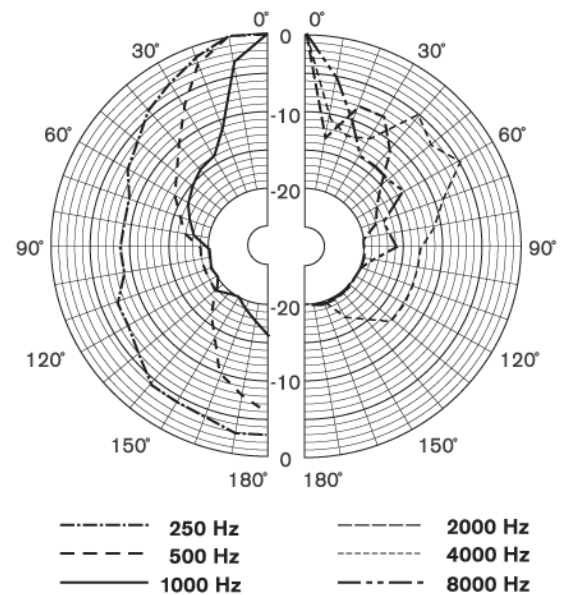

Polar diagram vertical (measured with pink noise)

Parts Included

Quantity	Component
1	column loudspeaker
1	swivel wall mounting bracket

Technical Specifications

Electrical*

Max. Power	36 W
Rated Power	24 W (24-12-6 W)
Sound Pressure Level at Rated Power/1 W	
(at 1 kHz, 1 m)	110 / 96 dB (SPL)
Effective Frequency Range (-10 dB)	165 Hz to 16 kHz
Opening Angle	
(at 1 kHz / 4 kHz, - 6 dB)	
Horizontal	190° / 88°
Vertical	30° / 8°
Rated Input Voltage	100 V
Rated Impedance	417 ohm

Mechanical

Connection	4-pole push-in terminal block
Dimensions (H x W x D)	841x 151 x 129 mm (33.1 x 5.9 x 5.1 inch)
Color	Black (D) or white (L)
Cabinet / Front	Matches RAL 9004 / RAL 9004 (D)
Cabinet / Front	Matches RAL 9010 / RAL 7044 (L)
Weight	5.5 kg (12.1 lb)

Environmental

Ambient Temperature	- 15°C to + 55°C
---------------------	------------------

*) Technical performance data acc. to IEC 60268-5

Ordering Information

Model | Description

LA1-UW24-D Column Loudspeaker
24 W, black

LA1-UW24-L Column Loudspeaker
24 W, white

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 (0) 40 27 83955
Fax: +31 (0) 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by