

Document downloaded from:

<http://hdl.handle.net/10251/121428>

This paper must be cited as:

Piqueras-García, MÁ.; Company Rossi, R.; Jódar Sánchez, LA. (2018). Computing positive stable numerical solutions of moving boundary problems for concrete carbonation. *Journal of Computational and Applied Mathematics*. 330:794-805.
<https://doi.org/10.1016/j.cam.2017.03.007>



The final publication is available at

<http://doi.org/10.1016/j.cam.2017.03.007>

Copyright Elsevier

Additional Information

Computing positive stable numerical solutions of moving boundary problems for concrete carbonation

M.-A. Piqueras, R. Company¹, L. Jódar

Instituto de Matemática Multidisciplinar, Universitat Politècnica de València, Camino de Vera s/n, 46022 Valencia, Spain

Abstract

This paper deals with the construction and computation of numerical solutions of a coupled mixed partial differential equation system arising in concrete carbonation problems. The moving boundary problem under study is firstly transformed in a fixed boundary one, allowing the computation of the propagation front as a new unknown that can be computed together with the mass concentrations of CO₂ in air and water. Apart from the stability and the consistency of the numerical solution, constructed by a finite difference scheme, qualitative properties of the numerical solution are established. In fact, positivity of the concentrations, increasing properties of the propagation front and monotone behaviour of the solution are proved. We also confirm numerically the \sqrt{t} -law of propagation. Results are illustrated with numerical examples.

Keywords: Free-boundary problem, concrete carbonation, numerical analysis, computing, front-fixing transformation.

Email addresses: mipigar@cam.upv.es (M.-A. Piqueras), rcompany@imm.upv.es (R. Company), ljodar@imm.upv.es (L. Jódar)

¹Corresponding author.

1. Introduction

Environmental impact on concrete parts of buildings and civil engineering works such as bridges, sewage pipes and seawalls results in a variety of chemical and mechanical changes. The bulk of these changes leads to damaging and destabilization of the concrete itself or of the reinforcement embedded in the concrete. It is well known that in all carbonation scenarios, gaseous carbon dioxide is assumed to be supplied from an inexhaustible exterior source to the concrete sample, [1, 2]. Carbon dioxide entering the non-saturated concrete sample through the air parts of the pores dissolves into the pore water and forms carbonic acid. This phenomenon, called concrete carbonation, may reduce the durability of reinforced concrete structures, causing the corrosion of the steel bars. The concrete carbonation level is measured throughout the CO_2 mass concentration in air and water phases in the concrete pores, that needs to be calculated. Gradually the process penetrates deeper into the concrete shaping a carbonation front that separates the carbonated zone from the uncarbonated one. A good understanding of the evolution of the carbonation process is crucial to predict the life service of concrete structures and save important amounts of money and energy.

Empirical evidences of the behaviour of the carbonation front propagation have shown a dependence on time following the so-called \sqrt{t} -law, [3, 4, 5, 6, 7, 8, 9, 10]. In the framework of moving-boundary problems, to our knowledge, Tuutti [11] in 1982, was the first appealing to the square root of t -law in the problem of concrete carbonation. Such conclusions were based on the Neumann solution of the two-phase Stefan problem, see Section 13.2.2 of [12].

In recent papers [1, 13], the authors studied a one-dimensional free boundary problem modeling the carbonation process. The unknown CO_2 mass concentrations in air and water phases of pores are denoted by $U(t, x)$ and $V(t, x)$ respectively, depending on variables time t and space x . The space variable x is measured from the exposed boundary $x = 0$ to the unknown carbonation front

$x = S(t)$. In the the system (2)-(9) it is assumed that κ_1 and κ_2 are positive diffusion constants ($\kappa_1 \gg \kappa_2$) and the functions $f(U, V)$ and $\psi(r)$ are defined as

$$f(U, V) = \beta(\gamma V - U), \quad \beta > 0, \quad \gamma > 0. \quad (1)$$

The continuous model is described by

$$\frac{\partial U}{\partial t} - \frac{\partial}{\partial x} \left(\kappa_1 \frac{\partial U}{\partial x} \right) = f(U, V), \quad 0 < t < T, \quad 0 < x < S(t), \quad (2)$$

$$\frac{\partial V}{\partial t} - \frac{\partial}{\partial x} \left(\kappa_2 \frac{\partial V}{\partial x} \right) = -f(U, V), \quad 0 < t < T, \quad 0 < x < S(t), \quad (3)$$

together with the left boundary conditions

$$U(t, 0) = G(t), \quad V(t, 0) = H(t), \quad 0 \leq t \leq T. \quad (4)$$

The propagation front behaviour comes out from the Stefan-like conditions, involving function $\psi(r)$ linked to the chemical reactions:

$$S'(t) = \psi(U(t, S(t))), \quad 0 < t < T, \quad (5)$$

$$-\kappa_1 \frac{\partial U}{\partial x}(t, S(t)) = \psi(U(t, S(t))) + S'(t)U(t, S(t)), \quad 0 < t < T, \quad (6)$$

$$-\kappa_2 \frac{\partial V}{\partial x}(t, S(t)) = S'(t)V(t, S(t)), \quad 0 < t < T. \quad (7)$$

Function $\psi(r)$ is given by

$$\psi(r) = \alpha|r|^p, \quad r \in \mathbb{R}, \quad \alpha > 0, \quad p \geq 1, \quad (8)$$

²⁵ where p is the so called order of the chemical reaction.

The bounded initial conditions functions are described by

$$S(0) = S_0, \quad U(0, x) = U_0(x), \quad V(0, x) = V_0(x), \quad 0 < x < S_0. \quad (9)$$

Aiki and Muntean [1, 13] show qualitative properties of the solutions $U(t, x)$ and $V(t, x)$ of (2)-(9) as positivity and boundedness for fairly well posed initial conditions. Furthermore, they also justify rigorously that the carbonation front $S(t)$ satisfies a long time behaviour of the type $C_1\sqrt{t} \leq S(t) \leq C_2\sqrt{t}$, when the exposed boundary conditions are constant, $G(t) = G^*$, $H(t) = H^*$, and linked by the condition $G^* = \gamma H^*$. Numerical simulations of the solution of carbonation problems using the finite element method have been performed in [14, 15].

As the exact solution of the model (2)-(9) is not available and the best model may be wasted with a bad numerical analysis, in this paper we provide conditionally stable positive numerical solutions, apart from preserving the qualitative properties of the theoretical solution.

In Section 2, after a front-fixing transformation approach, the original problem is transformed into another one where the moving boundary becomes a new unknown of the problem, allowing the possibility to compute the expanding front. We propose a coupled finite difference scheme whose unknowns are both CO_2 concentrations, in air and water phases of pores, as well as the square power values of the expanding front. In Section 3, stability and positivity of the numerical solution is treated. The monotone increase in time behaviour of the expanding front is shown numerically. We also prove for a fixed time the CO_2 concentrations are spatially decreasing from the exposed front to the carbonation front. Section 4 deals with a numerical conformation of the \sqrt{t} -law assumption. Numerical experiments illustrating the shown properties are included in the corresponding sections. Consistency of the proposed numerical scheme with the PDE problem is addressed in Section 5.

2. Front-fixing transformation and discretization

Let us begin this section by transforming the moving boundary problem (2)-(9) into another one with fixed boundary conditions. The Landau transfor-

mation, [16, 17], suggests the substitution

$$L(t) = S^2(t), \quad z(t, x) = \frac{x}{\sqrt{L(t)}}, \quad 0 \leq t \leq T, \quad 0 < x < \sqrt{L(t)}. \quad (10)$$

Using substitution (10), the problem (2)-(9) becomes

$$L(t) \frac{\partial W}{\partial t} - L'(t) \frac{z}{2} \frac{\partial W}{\partial z} - \kappa_1 \frac{\partial^2 W}{\partial z^2} = L(t) \beta (\gamma Y - W), \quad 0 < t < T, \quad 0 < z < 1, \quad (11)$$

$$L(t) \frac{\partial Y}{\partial t} - L'(t) \frac{z}{2} \frac{\partial Y}{\partial z} - \kappa_2 \frac{\partial^2 Y}{\partial z^2} = -L(t) \beta (\gamma Y - W), \quad 0 < t < T, \quad 0 < z < 1, \quad (12)$$

where

$$W(t, z) = U(t, x), \quad Y(t, z) = V(t, x). \quad (13)$$

In addition, the new boundary conditions take the form

$$W(t, 0) = G(t), \quad Y(t, 0) = H(t), \quad 0 \leq t \leq T. \quad (14)$$

The Stefan-like conditions (5)-(7) are transformed into

$$L'(t) = 2\sqrt{L(t)}\alpha[W(t, 1)]^p, \quad 0 < t < T, \quad (15)$$

$$-2\kappa_1 \frac{\partial W}{\partial z}(t, 1) = L'(t)(1 + W(t, 1)), \quad 0 < t < T, \quad (16)$$

$$-2\kappa_2 \frac{\partial Y}{\partial z}(t, 1) = L'(t)Y(t, 1), \quad 0 < t < T, \quad (17)$$

and the initial conditions (9) become

$$L(0) = L_0; \quad W(0, z) = W_0(z) = U_0(zS_0); \quad Y(0, z) = Y_0(z) = V_0(zS_0), \quad 0 < z < 1. \quad (18)$$

Note that the transformed problem (11)-(18) is an initial-fixed boundary problem for a system of two nonlinear parabolic partial differential equations in the bounded fixed domain $(0, T) \times (0, 1)$.

Let N and M be positive integers and let us consider the step sizes discretizations $k = \Delta t = T/N$, $h = \Delta z = 1/M$ and the mesh points (t^n, z_j) , with $t^n = nk$, $z_j = jh$, $0 \leq n \leq N$, $0 \leq j \leq M$. Numerical approximations of the involved variables are denoted by: $w_j^n \approx W(t^n, z_j)$, $y_j^n \approx Y(t^n, z_j)$, $l^n \approx L(t^n)$, while we denote $G^n = G(t^n)$, $H^n = H(t^n)$.

Partial derivatives at the interior points are approximated using forward in time and centered in space finite difference expressions:

$$\frac{w_j^{n+1} - w_j^n}{k} \approx \frac{\partial W}{\partial t}(t^n, z_j), \quad \frac{y_j^{n+1} - y_j^n}{k} \approx \frac{\partial Y}{\partial t}(t^n, z_j), \quad \frac{l^{n+1} - l^n}{k} \approx L'(t^n), \quad (19)$$

$$\frac{w_{j+1}^n - w_{j-1}^n}{2h} \approx \frac{\partial W}{\partial z}(t^n, z_j), \quad \frac{w_{j-1}^n - 2w_j^n + w_{j+1}^n}{h^2} \approx \frac{\partial^2 W}{\partial z^2}(t^n, z_j), \quad (20)$$

$$\frac{y_{j+1}^n - y_{j-1}^n}{2h} \approx \frac{\partial Y}{\partial z}(t^n, z_j), \quad \frac{y_{j-1}^n - 2y_j^n + y_{j+1}^n}{h^2} \approx \frac{\partial^2 Y}{\partial z^2}(t^n, z_j). \quad (21)$$

To preserve the second order accuracy at the right boundary $z = 1$, we take left side approximations with three points:

$$\frac{3w_M^n - 4w_{M-1}^n + w_{M-2}^n}{2h} \approx \frac{\partial W}{\partial z}(t^n, 1), \quad \frac{3y_M^n - 4y_{M-1}^n + y_{M-2}^n}{2h} \approx \frac{\partial Y}{\partial z}(t^n, 1). \quad (22)$$

Using the approximations (19)-(21), equations (11)-(12) become discretized at the interior mesh points in the following way

$$\begin{aligned} & l^n \frac{w_j^{n+1} - w_j^n}{k} - \frac{z_j}{2} \frac{w_{j+1}^n - w_{j-1}^n}{2h} \left(\frac{l^{n+1} - l^n}{k} \right) - \kappa_1 \frac{w_{j-1}^n - 2w_j^n + w_{j+1}^n}{h^2} \\ & = l^n \beta (\gamma y_j^n - w_j^n), \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1, \end{aligned} \quad (23)$$

$$\begin{aligned}
& l^n \frac{y_j^{n+1} - y_j^n}{k} - \frac{z_j}{2} \frac{y_{j+1}^n - y_{j-1}^n}{2h} \left(\frac{l^{n+1} - l^n}{k} \right) - \kappa_2 \frac{y_{j-1}^n - 2y_j^n + y_{j+1}^n}{h^2} \\
& = -l^n \beta (\gamma y_j^n - w_j^n), \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1.
\end{aligned} \tag{24}$$

Initial conditions given in (18) take the discrete form

$$l^0 = S^2(0) = S_0^2, \quad w_j^0 = U_0(z_j S_0), \quad y_j^0 = V_0(z_j S_0), \quad 1 \leq j \leq M-1. \tag{25}$$

Note that the starting values w_M^0 and y_M^0 are not given and need to be obtained.

Left boundary conditions are discretized as

$$w_0^n = G^n, \quad y_0^n = H^n, \quad 0 \leq n \leq N. \tag{26}$$

The discretization of the Stefan-like conditions (15)-(17) takes the form

$$\frac{l^{n+1} - l^n}{k} = 2\alpha(l^n)^{\frac{1}{2}}(w_M^n)^p, \quad 0 \leq n \leq N-1, \tag{27}$$

$$-\kappa_1 \frac{3w_M^n - 4w_{M-1}^n + w_{M-2}^n}{h} = \frac{l^{n+1} - l^n}{k} (1 + w_M^n), \quad 0 \leq n \leq N-1, \tag{28}$$

$$-\kappa_2 \frac{3y_M^n - 4y_{M-1}^n + y_{M-2}^n}{h} = \frac{l^{n+1} - l^n}{k} y_M^n, \quad 0 \leq n \leq N-1. \tag{29}$$

For the sake of clarity we explain how to transit from the time level n to $n+1$. Firstly, solving (27)-(29) for $n=0$ one gets the starting unknown values w_M^0 and y_M^0 , as well as l^1 . Then, from the values for the time level n , $\{w_j^n, y_j^n, l^n; 0 \leq j \leq M-1\}$, one needs to obtain the remaining values $\{w_M^n, y_M^n\}$ and $\{w_j^{n+1}, y_j^{n+1}, l^{n+1}; 1 \leq j \leq M-1\}$. Note that the nonlinear system (27)-(28) is coupled in the unknowns w_M^n and l^{n+1} . From (27) one gets

$$l^{n+1} = l^n + 2k\alpha(l^n)^{\frac{1}{2}}(w_M^n)^p, \quad 0 \leq n \leq N-1. \tag{30}$$

By substituting (30) in (28) the following nonlinear equation in w_M^n for each step n must be solved

$$F_n(w_M^n) = 0, \quad 0 \leq n \leq N, \quad (31)$$

where $F_n : [0, \infty[\rightarrow \mathbb{R}$, is given by

$$F_n(\xi) = 2\alpha(l^n)^{\frac{1}{2}}\xi^{p+1} + 2\alpha(l^n)^{\frac{1}{2}}\xi^p + \frac{3\kappa_1}{h}\xi - \frac{\kappa_1}{h}(4w_{M-1}^n - w_{M-2}^n). \quad (32)$$

70 We solve equation (31)-(32) using Newton iteration method. Once w_M^n is calculated solving (31)-(32), the unknown l^{n+1} is given by (30) and y_M^n is computed using (29). In this process, positivity of the involved quantities w_M^n , l^n and y_M^n has to be proved. This positiveness requirement is fulfilled in Section 3.

Finally, equations (23)-(24) allow to obtain explicitly the solutions at the interior points at time level $n+1$ as follows

$$w_j^{n+1} = a_{1,j}^n w_{j-1}^n + b_{1,j}^n w_j^n + c_{1,j}^n w_{j+1}^n + k\beta\gamma y_j^n, \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1, \quad (33)$$

$$y_j^{n+1} = a_{2,j}^n y_{j-1}^n + b_{2,j}^n y_j^n + c_{2,j}^n y_{j+1}^n + k\beta w_j^n, \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1, \quad (34)$$

where

$$\begin{aligned} a_{i,j}^n &= \frac{\kappa_i k}{h^2 l^n} - \frac{z_j}{4h} \Delta^n, & c_{i,j}^n &= \frac{\kappa_i k}{h^2 l^n} + \frac{z_j}{4h} \Delta^n, & i &= 1, 2, \\ b_{1,j}^n &= 1 - k\beta - \frac{2\kappa_1 k}{h^2 l^n}, & b_{2,j}^n &= 1 - k\beta\gamma - \frac{2\kappa_2 k}{h^2 l^n}, \end{aligned} \quad (35)$$

and

$$\Delta^n = \frac{l^{n+1}}{l^n} - 1. \quad (36)$$

75 We summarize the construction of the numerical solution in the procedure exposed in Algorithm 1.

Algorithm 1: Calculation procedure for (w_j^n, y_j^n, l^n)

Data: Initial conditions given in (25); Boundary conditions given in (26).

Result: Solution (w_j^n, y_j^n, l^n) of the problem (23)-(29).

```
1 n=0;
2 while n ≤ N do
3   Compute  $w_M^n$  solving (31)-(32) by Newton-Raphson method:
   Data:  $(w_M^n)^0$ , Initial estimate of  $w_M^n$ ;  $e$ , Tolerance.
   Result:  $w_M^n$ .
4   i=0;
5    $(w_M^n)^1 = (w_M^n)^0 - F_n((w_M^n)^0)/F_n'((w_M^n)^0)$ ;
6   while  $\left| \frac{(w_M^n)^{i+1} - (w_M^n)^i}{(w_M^n)^{i+1}} \right| \geq e$  do
7     i=i+1;
8      $(w_M^n)^{i+1} = (w_M^n)^i - F_n((w_M^n)^i)/F_n'((w_M^n)^i)$ ;
9   end
10  Compute  $l^{n+1}$  by (30);
11  Compute  $y_M^n$  using (29);
12  while n ≤ N - 1 do
13    for j = 1, ..., M - 1 do
14      Obtain  $w_j^{n+1}$  by (33);
15      Obtain  $y_j^{n+1}$  by (34);
16    end
17  end
18  n=n+1;
19 end
```

3. Positivity, stability and monotonicity of the numerical solution

Dealing with concentrations, the positivity of the computed values is not an alternative but a necessity that needs to be guaranteed. We use an inductive
 80 method where, under the assumption that values $\{w_j^n, y_j^n, l^n; 1 \leq j \leq M-1\}$ are positive, we show the positivity of the elements of $\{w_j^{n+1}, y_j^{n+1}, l^{n+1}; 1 \leq j \leq M-1\}$, as well as the positivity of the remaining values on the right boundary of the discrete domain, $\{w_M^n, y_M^n\}$.

Let us start showing the positivity of the solution w_M^n of equation (31)-(32) paying attention to the last term of equation (32). Note that from Taylor's theorem one has

$$w_{M-2}^n = w_{M-1}^n - h \frac{\partial W}{\partial z}(t^n, \xi); \quad (M-2)h < \xi < (M-1)h. \quad (37)$$

Let E_n be defined by

$$E_n = \max \left| \frac{\partial W}{\partial z}(t^n, z) \right|, \quad 0 \leq z \leq 1, \quad (38)$$

from (37) and (38)

$$|w_{M-2}^n - w_{M-1}^n| < E_n h. \quad (39)$$

Hence, taking $h < 3w_{M-1}^n/E_n$, one gets

$$4w_{M-1}^n - w_{M-2}^n = 3w_{M-1}^n + (w_{M-1}^n - w_{M-2}^n) > 3w_{M-1}^n - E_n h > 0. \quad (40)$$

Let us denote $\delta^n = (4w_{M-1}^n - w_{M-2}^n)/3 > 0$ and note that $F_n(\xi)$ de-
 85 fined by (32) is a continuous strictly increasing function satisfying $F_n(0) = (-3\kappa_1/h)\delta^n < 0$ and $F_n(\delta^n) > 0$, for each $n \geq 0$. Thus, there exists a unique point ξ_*^n such that $0 < \xi_*^n < \delta^n$ and $F_n(\xi_*^n) = 0$. This unique solution of (31)-(32) is the required value $w_M^n = \xi_*^n > 0$.

From (30) and induction principle, it follows that

$$0 < l^n < l^{n+1}, \quad 0 \leq n \leq N-1. \quad (41)$$

From (29), one gets

$$y_M^n = k \left[\frac{\kappa_2(4y_{M-1}^n - y_{M-2}^n)}{3k\kappa_2 + h(l^{n+1} - l^n)} \right], \quad 0 \leq n \leq N-1. \quad (42)$$

Positivity of $(4y_{M-1}^n - y_{M-2}^n)$ for small enough values of h , is obtained in
 90 analogous way to the proof of the same result for $(4w_{M-1}^n - w_{M-2}^n)$. Using (41)
 and (42) we have that $y_M^n > 0$.

Regarding to the positivity of the remaining w_j^{n+1} and y_j^{n+1} , $1 \leq j \leq M-1$,
 let us study the nonnegativity of the coefficients (35) of the scheme (33)-(34).
 From (35) and (41) one gets that $c_{i,j}^n > 0$, $i = 1, 2$, and

$$b_{1,j}^n \geq 1 - k\beta - \frac{2\kappa_1 k}{h^2 l_0}, \quad b_{2,j}^n \geq 1 - k\beta\gamma - \frac{2\kappa_2 k}{h^2 l_0}. \quad (43)$$

Then, coefficients $b_{i,j}^n$, $i = 1, 2$, are positive under the condition

$$k < k_0 = \min\{k_1, k_2\}, \quad (44)$$

where

$$k_1 = \frac{h^2 l_0}{2\kappa_1 + h^2 \beta l_0}, \quad k_2 = \frac{h^2 l_0}{2\kappa_2 + h^2 \beta \gamma l_0}. \quad (45)$$

Now we address the nonnegativity of the coefficients $a_{1,j}^n$, whose sign depends
 on the difference $l^{n+1} - l^n$ and, from the discretization of the Stefan-like
 condition (28), this difference involves w_M and $(4w_{M-1} - w_{M-2})$.

In order to simplify these relationships, let us consider the right-hand side
 approximation of the spatial partial derivative of $W(t, z)$ at $(t^n, 1)$

$$\frac{-3w_M^n + 4w_{M+1}^n - w_{M+2}^n}{2h} = \frac{\partial W}{\partial z}(t^n, 1) + \mathcal{O}(h^2), \quad (46)$$

95 where the artificial values w_{M+1}^n and w_{M+2}^n vanish because they are outside of
 the real carbonated region.

In agreement with (22), left-hand side backward approximation of the spatial
 partial derivative of $W(t, z)$ at $(t^n, 1)$ satisfies

$$\frac{3w_M^n - 4w_{M-1}^n + w_{M-2}^n}{2h} = \frac{\partial W}{\partial z}(t^n, 1) + \mathcal{O}(h^2). \quad (47)$$

From (46)-(47), one gets

$$6w_M^n = 4w_{M-1}^n - w_{M-2}^n + \mathcal{O}(h^3). \quad (48)$$

Using (28) and (48), it follows that

$$l^{n+1} - l^n = \frac{k\kappa_1}{h} \frac{3w_M^n}{1+w_M^n} + \mathcal{O}(kh^2), \quad (49)$$

and from (35) and (49), using that $0 < z_j \leq 1$,

$$a_{1,j}^n \geq \frac{\kappa_1 k}{h^2 l^n} \left(\frac{4 + w_M^n}{4(1 + w_M^n)} + \mathcal{O}(h^3) \right). \quad (50)$$

Hence, for small enough values of k and h , coefficients $a_{1,j}^n$ are positive. Finally, from the expression (35) for $a_{2,j}^n$, managing the values of y_M^n and $(4y_{M-1}^n - y_{M-2}^n)$ in analogous way to the previous study with w_j^n , one gets

$$6y_M^n = 4y_{M-1}^n - y_{M-2}^n + \mathcal{O}(h^3), \quad (51)$$

$$l^{n+1} - l^n = \frac{3k\kappa_2}{h} + \mathcal{O}(kh^2), \quad (52)$$

and

$$a_{2,j}^n \geq \frac{\kappa_2 k}{h^2 l^n} \left(\frac{1}{4} + \mathcal{O}(h^3) \right). \quad (53)$$

Summarizing, the following result has been established:

Theorem 1. *With previous notation, for small enough values of the step sizes h and k linked by the condition (44)-(45), the following conclusions hold true:*

- i) Concentration solutions of the scheme (33)-(34) w_j^n and y_j^n are positive for $1 \leq j \leq M-1$, $1 \leq n \leq N$.*
- ii) Concentrations at the right boundary w_M^n and y_M^n are positive.*
- iii) The moving carbonation front is positive and increasing, $0 < l^0 < l^1 < \dots < l^N$.*

The positivity guaranteed by Theorem 1 is not unconditional and the following example shows that this condition can not be removed.

Example 1. In accordance with [15], consider the carbonation model (2)-(9) with parameters listed in the Table 1 and time horizon $T = 15$ years. For $h = 0.05$, one gets $k_1 = 0.0062$ and $k_2 = 0.0625$. Taking $k = 0.0075$, the positivity condition is broken. Figure 1 shows that positivity does not hold. Units in x-axe are taken in cm and y-axe in 10^{-6} g cm $^{-3}$.

Magnitude	Value
Initial concentrations ($10^{-6} \times \text{g cm}^{-3}$)	
$U_0(x), 0 < x < S_0$	$0.80 - 1.50x$
$V_0(x), 0 < x < S_0$	$200000 - 398000x$
Exposed boundary concentrations ($10^{-6} \times \text{g cm}^{-3}$)	
$G(t)$	0.80
$H(t)$	200000
Diffusion constants ($10^8 \times \text{cm}^2 \text{ year}^{-1}$)	
κ_1	0.05
κ_2	0.005
Model parameters	
α	1.00
β (year $^{-1}$)	0.001
γ	5×10^{-6}
p	2.00
Initial position of carbonation front (cm)	
S_0	0.50

Table 1: Data for numerical examples.

Apart from the positivity of the numerical solution, a crucial requirement is the stability of such numerical solution. For the sake of clarity in the presentation and because of the existence in the literature of several definitions of

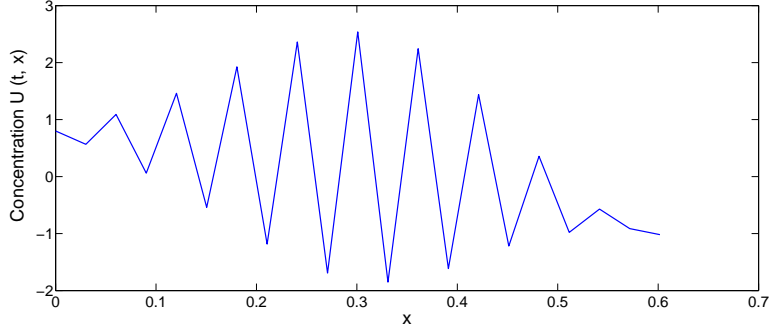


Figure 1: Numerical solution of Example 1 for $t = 0.375$ years, when positivity condition is broken.

stability, we precise the concept of stability we use. As the stability is related to the boundedness of the numerical solution, we need to precise a norm. We denote the so called supremum norm of a vector $x = (x_1, x_2, \dots, x_n)^T$ in \mathbb{R}^n as $\|x\|_\infty = \max(|x_1|, |x_2|, \dots, |x_n|)$.

Definition 1. *With previous notation, let us denote the vectors of CO_2 concentrations $w^n = [w_0^n, w_1^n, \dots, w_M^n]^T$ and $y^n = [y_0^n, y_1^n, \dots, y_M^n]^T$. We say that the numerical solution $\{w^n, y^n, 0 \leq n \leq N\}$ is $\|\cdot\|_\infty$ -stable if there exist positive constants C_1 and C_2 independent of n, k and h , such that*

$$\|w^n\|_\infty \leq C_1, \quad \|y^n\|_\infty \leq C_2, \quad 0 \leq n \leq N. \quad (54)$$

Now we show that under the positivity conditions of Theorem 1, the numerical solution $\{w_j^n, y_j^n\}$ is $\|\cdot\|_\infty$ -stable. Let $G(t)$ and $H(t)$ be the left boundary conditions given by (4) and let $U_0(x)$ and $V_0(x)$ be the initial conditions given by (9). Let \tilde{G} and \tilde{H} be positive upper bounds such that

$$\left. \begin{aligned} G(t) &\leq \tilde{G}, \quad H(t) \leq \tilde{H}, \quad 0 \leq t \leq T, \\ U_0(z_j S_0) &= w_j^0 \leq \tilde{G}, \quad V_0(z_j S_0) = y_j^0 \leq \tilde{H}, \quad 1 \leq j \leq M-1, \\ \tilde{G} &= \gamma \tilde{H}. \end{aligned} \right\} \quad (55)$$

From (48) and (51) evaluated at $n = 0$ it follows

$$w_M^0 < \frac{2}{3} w_{M-1}^0 \leq \tilde{G}, \quad y_M^0 < \frac{2}{3} y_{M-1}^0 \leq \tilde{H}. \quad (56)$$

Once we have the bound at the time level $n = 0$, we prove using the induction principle the boundedness of the numerical solution for all the time levels. Let us assume the induction hypothesis

$$w_j^n \leq \tilde{G}, \quad y_j^n \leq \tilde{H}, \quad 1 \leq j \leq M, \quad \tilde{G} = \gamma \tilde{H}. \quad (57)$$

From (33)-(34) and (35) under the conditions of Theorem 1 one gets, for $1 \leq j \leq M - 1$,

$$w_j^{n+1} \leq (a_{1,j}^n + b_{1,j}^n + c_{1,j}^n) \tilde{G} + k\beta\gamma \tilde{H} = (1 - k\beta) \tilde{G} + k\beta\gamma \tilde{G} = \tilde{G}, \quad (58)$$

$$y_j^{n+1} \leq (a_{2,j}^n + b_{2,j}^n + c_{2,j}^n) \tilde{H} + k\beta \tilde{G} = (1 - k\beta\gamma) \tilde{H} + k\beta \tilde{G} = \tilde{H}. \quad (59)$$

120 Furthermore, using (48) and (51), together with (58)-(59) for $j = M - 1$, it follows that $w_M^{n+1} \leq \tilde{G}$ and $y_M^{n+1} \leq \tilde{H}$.

Summarizing the following conditional stability result has been established:

Theorem 2. *With previous notation, for small enough values of h and k satisfying the positivity step size condition (44)-(45), the numerical solution of*
125 *scheme (33)-(34) is $\|\cdot\|_\infty$ -stable.*

As it has been shown in Example 1, where the positivity does not occur when the positivity condition (44)-(45) was broken, in the following example we show that when the positivity condition is satisfied, then we have both positivity and $\|\cdot\|_\infty$ -stability.

130 **Example 2.** With the notation and the parameters of Example 1, and step sizes $h = 0.05$ and $k = 0.005$, the stability of the solutions $U(t, x)$ and $V(t, x)$ is guaranteed as it is shown in Figure 2. Units in x-axis are taken in cm and y-axis in 10^{-6} g cm $^{-3}$.

An important property of the numerical solution is its monotone decreasing
135 behaviour with respect to the space from the exposed boundary to the carbonation front at each time level under the positivity step size conditions. For the

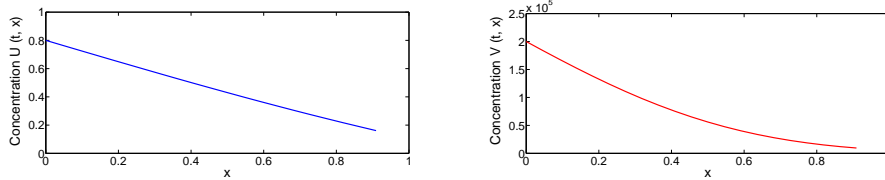


Figure 2: Numerical solution of $U(t, x)$ and $V(t, x)$ in Example 2 for $t = 13$ years, under stability condition.

sake of clarity in the presentation and the concept of monotone schemes has been used earlier in the literature [18], we introduce the following definition:

Definition 2. *With previous notation, we say that the numerical scheme (33)-
 140 (34) is spatial monotone preserving, if assuming that the numerical solution is spatial monotone decreasing at time level n , $0 \leq n \leq N - 1$, i. e.,:*

$$w_{j+1}^n \leq w_j^n, \quad y_{j+1}^n \leq y_j^n, \quad 0 \leq j \leq M - 1, \quad (60)$$

then, one satisfies

$$w_{j+1}^{n+1} \leq w_j^{n+1}, \quad y_{j+1}^{n+1} \leq y_j^{n+1}, \quad 0 \leq j \leq M - 1. \quad (61)$$

Now we state that, under the positivity constraints (44)-(45) on the coefficients (35) together with an additional condition for concentrations at the exposed boundary, the numerical scheme is spatial monotone preserving. This condition imposes that $G(t)$ and $H(t)$ are time monotone non decreasing functions satisfying

$$G(t) = \gamma H(t), \quad 0 \leq t \leq T. \quad (62)$$

From equation (33), the positivity of coefficients $a_{1,j}^n$, $b_{1,j}^n$, $c_{1,j}^n$ and the induction hypothesis of Definition 2, it follows that $w_{j-1}^n \geq w_j^n$, $w_j^n \geq w_{j+1}^n$,

$$\begin{aligned} w_j^{n+1} &\geq a_{1,j}^n w_j^n + b_{1,j}^n w_j^n + c_{1,j}^n w_j^n + k\beta\gamma y_j^n \\ &= \left(1 - k\beta - \frac{\kappa_1 k}{h^2 l^n} - \frac{j}{4} \Delta^n\right) w_j^n + c_{1,j}^n w_{j+1}^n + k\beta\gamma y_j^n, \quad 1 \leq j \leq M - 1, \end{aligned} \quad (63)$$

and

$$\begin{aligned}
w_{j+1}^{n+1} &\leq a_{1,j+1}^n w_j^n + b_{1,j}^n w_{j+1}^n + c_{1,j+1}^n w_{j+1}^n + k\beta\gamma y_{j+1}^n \\
&= \left(1 - k\beta - \frac{\kappa_1 k}{h^2 l^n} + \frac{j+1}{4} \Delta^n\right) w_{j+1}^n + a_{1,j+1}^n w_j^n + k\beta\gamma y_j^n, \quad 1 \leq j \leq M-2.
\end{aligned} \tag{64}$$

From (63) and (64) and the hypothesis condition of Definition 2 it follows that

$$w_{j+1}^{n+1} - w_j^{n+1} \leq \left(b_{1,j}^n + \frac{1}{4} \Delta^n\right) (w_{j+1}^n - w_j^n) + k\beta\gamma (y_{j+1}^n - y_j^n) \leq 0, \quad 1 \leq j \leq M-2. \tag{65}$$

Furthermore $w_M^{n+1} < w_{M-1}^{n+1}$ due to (56). Using equation (33) for $j = 1$, hypothesis of Definition 2 and assuming that $G(t)$ and $H(t)$ are monotone non decreasing functions satisfying (62), it follows

$$\begin{aligned}
w_1^{n+1} &\leq (a_{1,1}^n + b_{1,1}^n + c_{1,1}^n) w_0^n + k\beta\gamma y_0^n \\
&\leq (1 - k\beta) G^n + k\beta\gamma H^n = G^n \leq G^{n+1} = w_0^{n+1}.
\end{aligned} \tag{66}$$

The monotonicity of $\{y_j^{n+1}\}$ can be shown in an analogous way to that used for $\{w_j^{n+1}\}$, and the following result has been established.

Theorem 3. *With previous notation, under the positivity conditions (44)-(45), assuming that the concentrations at the exposed boundary are monotone non decreasing functions such that $G(t) = \gamma H(t)$, then the numerical scheme (33)-(34) is spatial monotone preserving.*

Next Example 3 illustrates the decreasing monotonicity behaviour of both concentrations $U(t, x)$ and $V(t, x)$ in the space variable when the time is fixed.

Example 3. With data of Table 1 and taking step sizes $h = 0.05$ and $k = 0.005$ satisfying the monotonicity requirements of Theorem 3, Figures 3 and 4 show the monotone behaviour of the functions $U(t_i, x)$ and $V(t_i, x)$ corresponding to the mass concentrations of CO_2 in air and water, respectively.

Here t_i , $1 \leq i \leq 5$, represent four equidistant fixed values of time. Note also that the carbonation zone is increasing with time, according to the spreading of the propagation front $S(t)$, see Theorem 1-iii).

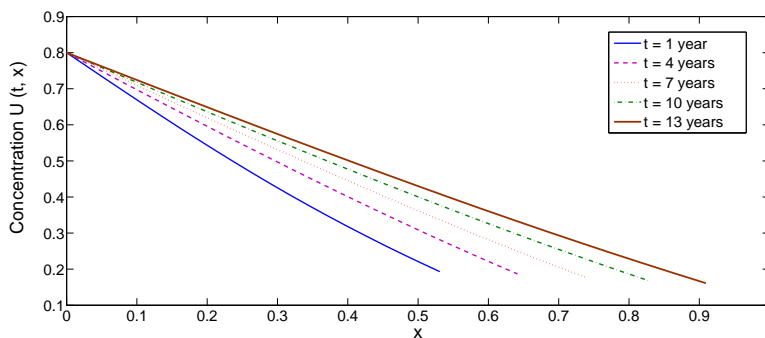


Figure 3: Numerical solution $U(t, x)$ of Example 3 for several equidistant times t_i .

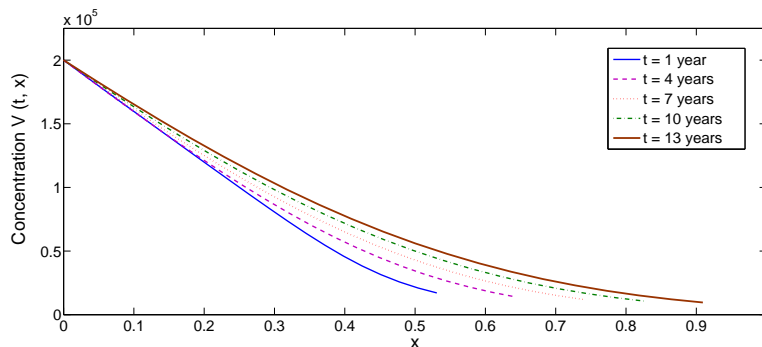


Figure 4: Numerical solution $V(t, x)$ of Example 3 for several equidistant times t_i .

4. Numerical evidences of the \sqrt{t} -law of propagation

160 In this Section we confirm numerically, under appropriated positivity conditions, that the proposed numerical solution behaves as the theoretical solution suggested. In fact, in the next example, according to data from [15], we match the numerical solution of the carbonation front as a function of the type $C\sqrt{t}$.

Example 4. With the same parameters and step size values of Example 2,
 165 Table 2 shows long time values of the carbonation front $S(t)$ on of time, with

a time horizon of $T = 35$ years. These points $(t_i, S(t_i))$ have been fitted to a curve with two parameters of the type $S(t) = at^b$. The best fit (in the least square sense) is matched by $a = 0.2715$ and $b = 0.4568$, and the coefficient of determination $R^2 = 0.9999$. This numerical experiment illustrates the agree-
170 ment with the behaviour of the theoretical solution.

t_i (years)	33.00	33.50	34.00	34.50	35.00
$S(t_i)$ (cm)	1.3407	1.3499	1.3591	1.3682	1.3772

Table 2: Carbonation depth for several times.

5. Consistency

Consistency of a numerical scheme with a PDE problem means that the theoretical solution of the problem approximates well the numerical scheme
175 when the step size discretizations tend to zero. So, a numerical scheme can be consistent with an equation and not with another one, see [19], Chap. 2, and [20], Chap. 1. Thus, it is important to address the consistency of a numerical scheme with a problem.

Equations of the problem (11)-(17) can be written in vector form as $\mathcal{L}(W, Y, L) = (\mathcal{L}_1(W, Y, L), \mathcal{L}_2(W, Y, L), \mathcal{L}_3(W, L), \mathcal{L}_4(W, L), \mathcal{L}_5(Y, L)) = 0$, in which

$$\mathcal{L}_1(W, Y, L) = L(t) \frac{\partial W}{\partial t} - L'(t) \frac{z}{2} \frac{\partial W}{\partial z} - \kappa_1 \frac{\partial^2 W}{\partial z^2} - L(t) \beta (\gamma Y - W) = 0, \quad t > 0, \quad 0 < z < 1, \quad (67)$$

$$\mathcal{L}_2(W, Y, L) = L(t) \frac{\partial Y}{\partial t} - L'(t) \frac{z}{2} \frac{\partial Y}{\partial z} - \kappa_2 \frac{\partial^2 Y}{\partial z^2} + L(t) \beta (\gamma Y - W) = 0, \quad t > 0, \quad 0 < z < 1, \quad (68)$$

$$\mathcal{L}_3(W, L) = L'(t) - 2(L(t))^{\frac{1}{2}} \alpha [W(t, 1)]^p = 0, \quad t > 0, \quad (69)$$

$$\mathcal{L}_4(W, L) = L'(t)(1 + W(t, 1)) + 2\kappa_1 \frac{\partial W}{\partial z}(t, 1) = 0, \quad t > 0, \quad (70)$$

$$\mathcal{L}_5(Y, L) = L'(t)Y(t, 1) + 2\kappa_2 \frac{\partial Y}{\partial z}(t, 1) = 0, \quad t > 0, \quad (71)$$

and the finite difference scheme (23)-(29), also can be written in a compact way as $\ell(w, y, l) = (\ell_1(w, y, l), \ell_2(w, y, l), \ell_3(w, l), \ell_4(w, l), \ell_5(y, l))$, where:

$$\begin{aligned} \ell_1(w, y, l) &= l^n \frac{w_j^{n+1} - w_j^n}{k} - \frac{z_j}{2} \frac{w_{j+1}^n - w_{j-1}^n}{2h} \left(\frac{l^{n+1} - l^n}{k} \right) - \kappa_1 \frac{w_{j-1}^n - 2w_j^n + w_{j+1}^n}{h^2} \\ &- l^n \beta (\gamma y_j^n - w_j^n) = 0, \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1, \end{aligned} \quad (72)$$

$$\begin{aligned} \ell_2(w, y, l) &= l^n \frac{y_j^{n+1} - y_j^n}{k} - \frac{z_j}{2} \frac{y_{j+1}^n - y_{j-1}^n}{2h} \left(\frac{l^{n+1} - l^n}{k} \right) - \kappa_2 \frac{y_{j-1}^n - 2y_j^n + y_{j+1}^n}{h^2} \\ &+ l^n \beta (\gamma y_j^n - w_j^n) = 0, \quad 0 \leq n \leq N-1, \quad 1 \leq j \leq M-1, \end{aligned} \quad (73)$$

$$\ell_3(w, l) = \frac{l^{n+1} - l^n}{k} - 2\alpha (l^n)^{\frac{1}{2}} (w_M^n)^p = 0, \quad 0 \leq n \leq N-1, \quad (74)$$

$$\ell_4(w, l) = \kappa_1 \frac{3w_M^n - 4w_{M-1}^n + w_{M-2}^n}{h} + \frac{l^{n+1} - l^n}{k} (1 + w_M^n) = 0, \quad 0 \leq n \leq N-1, \quad (75)$$

$$\ell_5(y, l) = \kappa_2 \frac{3y_M^n - 4y_{M-1}^n + y_{M-2}^n}{h} + \frac{l^{n+1} - l^n}{k} y_M^n = 0, \quad 0 \leq n \leq N-1. \quad (76)$$

In accordance with [19], scheme $\ell(w, y, l)$ is said to be consistent with problem $\mathcal{L}(W, Y, L)$ if local truncation error $T_j^n(W, Y, L) = (T(1)_j^n, T(2)_j^n, T(3)_j^n, T(4)_j^n, T(5)_j^n)$,

$$T(1)_j^n(W, Y, L) = \ell_1(W_j^n, Y_j^n, L^n) - \mathcal{L}_1(W_j^n, Y_j^n, L^n), \quad (77)$$

$$T(2)_j^n(W, Y, L) = \ell_2(W_j^n, Y_j^n, L^n) - \mathcal{L}_2(W_j^n, Y_j^n, L^n), \quad (78)$$

$$T(3)_j^n(W, L) = \ell_3(W_j^n, L^n) - \mathcal{L}_3(W_j^n, L^n), \quad (79)$$

$$T(4)_j^n(W, L) = \ell_4(W_j^n, L^n) - \mathcal{L}_4(W_j^n, L^n), \quad (80)$$

$$T(5)_j^n(Y, L) = \ell_5(Y_j^n, L^n) - \mathcal{L}_5(Y_j^n, L^n), \quad (81)$$

tends to zero as $k \rightarrow 0$, $h \rightarrow 0$, where $W_j^n = W(t^n, z_j)$, $Y_j^n = Y(t^n, z_j)$ and $L^n = L(t^n)$ are the values of the exact solution of problem (11)-(17) of both the PDE and the free boundary respectively at the point (t^n, z_j) . We assume that the exact solutions $\{W(t, z), Y(t, z)\}$ are continuously partial differentiable four times with respect to z and two times with respect to t . We also assume that $L(t)$ is two times continuously differentiable.

Let us first consider the components $T(1)_j^n$ and $T(2)_j^n$ of the local truncation error. By using Taylor's expansion about (t^n, z_j) one gets:

$$\begin{aligned} T(1)_j^n(W, Y, L) &= L^n E_j^n(2)k - \frac{z_j}{2} \frac{\partial W}{\partial z}(t^n, z_j)k E^n(1) \\ &\quad - \frac{z_j}{2} L'(t^n) E_j^n(3) - \frac{z_j}{2} E^n(1) E_j^n(3)kh^2 - \kappa_1 E_j^n(4)h^2, \end{aligned} \quad (82)$$

$$\begin{aligned} T(2)_j^n(W, Y, L) &= L^n E_j^n(5)k - \frac{z_j}{2} \frac{\partial Y}{\partial z}(t^n, z_j)k E^n(1) \\ &\quad - \frac{z_j}{2} L'(t^n) E_j^n(6) - \frac{z_j}{2} E^n(1) E_j^n(6)kh^2 - \kappa_2 E_j^n(7)h^2, \end{aligned} \quad (83)$$

where:

$$\begin{aligned} E^n(1) &= \frac{1}{2} \frac{d^2 L}{dt^2}(\tau^1), \quad E_j^n(2) = \frac{1}{2} \frac{\partial^2 W}{\partial t^2}(\tau^2, z_j), \quad E_j^n(5) = \frac{1}{2} \frac{\partial^2 Y}{\partial t^2}(\tau^3, z_j), \\ t^n &< \tau^i < t^{n+1}, \quad i = 1, 2, 3, \end{aligned} \quad (84)$$

$$\begin{aligned} E_j^n(3) &= \frac{1}{6} \frac{\partial^3 W}{\partial z^3}(t^n, \xi_1), \quad E_j^n(4) = \frac{1}{12} \frac{\partial^4 W}{\partial z^4}(t^n, \xi_2), \quad E_j^n(6) = \frac{1}{6} \frac{\partial^3 Y}{\partial z^3}(t^n, \xi_3), \\ E_j^n(7) &= \frac{1}{12} \frac{\partial^4 Y}{\partial z^4}(t^n, \xi_4), \quad z_{j-1} < \xi_i < z_{j+1}, \quad i = 1, 2, 3, 4, \end{aligned} \quad (85)$$

$$E_j^n(8) = \frac{1}{3} \frac{\partial^3 W}{\partial z^3}(t^n, \xi_5), \quad E_j^n(9) = \frac{1}{3} \frac{\partial^3 Y}{\partial z^3}(t^n, \xi_6), \quad z_{M-2} < \xi_i < z_M, \quad i = 5, 6. \quad (86)$$

Hence, $T(1)_j^n(W, Y, L)$ and $T(2)_j^n(W, Y, L)$ satisfy

$$T(1)_j^n(W, Y, L) = \mathcal{O}(k) + \mathcal{O}(h^2), \quad (87)$$

$$T(2)_j^n(W, Y, L) = \mathcal{O}(k) + \mathcal{O}(h^2). \quad (88)$$

The remaining components of the truncation error are

$$T(3)_j^n(W, L) = kE^n(1), \quad (89)$$

$$T(4)_j^n(W, L) = kE^n(1)(1 + W(t^n, z_M)) - 2h^2\kappa_1 E_j^n(8), \quad (90)$$

$$T(5)_j^n(Y, L) = kE^n(1)Y(t^n, z_M) - 2h^2\kappa_2 E_j^n(9). \quad (91)$$

Thus, it holds

$$T(3)_j^n(W, L) = \mathcal{O}(k), \quad (92)$$

$$T(4)_j^n(W, L) = \mathcal{O}(k) + \mathcal{O}(h^2), \quad (93)$$

$$T(5)_j^n(Y, L) = \mathcal{O}(k) + \mathcal{O}(h^2). \quad (94)$$

185 Summarizing, the following result has been established:

Theorem 4. *With previous notation, the scheme $\ell(w, y, l)$ is consistent with the problem $\mathcal{L}(W, Y, L)$ and the local truncation error behaves as:*

$$T_j^n(W, Y, L) = \mathcal{O}(k) + \mathcal{O}(h^2). \quad (95)$$

Remark 1. *Note that the coefficients of (35), carbonation front l^{n+1} and the CO_2 concentration in water y_M^n at the propagation front, are distorted by the computation of the CO_2 concentration in air w_M^n at the propagation front, using Newton-Raphson method to solve equation (31)-(32). This means that above we*
190 *studied the consistency of the scheme resulting of replacing in (23)-(29) the theoretical value w_M^n by the numerical one \tilde{w}_M^n obtained by the Newton-Raphson method. Standard analysis based on the mean value theorem shows that the error of order p motivated by equation (30) is linearly transmitted to the other variables adding a local error of order $\mathcal{O}(|w_M^n - \tilde{w}_M^n|^p)$ to the expression (95).*

Remark 2. *The real initial deterioration state of the concrete in the carbonation process is measured in terms of the value $L(0) = S^2(0) = S_0^2$. This value has influence in the step size conditions (44)-(45) in order to guarantee positivity, stability and monotonicity, that cannot be removed as Example 1 shows. However, this fact does not mean a limitation in our study and its applications, when $S(0)$ is small enough, because starting from any initial position of the carbonation front, using the substitution*

$$\tau = \frac{\kappa_1 t}{L(0)}, \quad \lambda(\tau) = \frac{L(t)}{L(0)}, \quad (96)$$

195 *the problem becomes independent of this situation, as well as of the quality of diffusion given by the coefficient κ_1 .*

Acknowledgements

This work has been partially supported by the European Union in the FP7-PEOPLE-2012-ITN program under Grant Agreement Number 304617 (FP7
200 Marie Curie Action, Project Multi-ITN STRIKE-Novel Methods in Computational Finance) and the Ministerio de Economía y Competitividad Spanish grant MTM 2013-41765-P.

References

- [1] T. Aiki, A. Muntean, Large time behavior of solutions to concrete carbonation problem, *Comm. Pure Appl. Anal.* (9) (2010) 1117–1129.
205
- [2] T. Ishida, K. Maekawa, M. Soltani, Theoretically identified strong coupling of carbonation rate and thermodynamic moisture states in micropores of concrete, *Journal of Advanced Concrete Technology* 2 (2) (2004) 213–222.
- [3] J.-H. Brown, Carbonation. the effect of exposure and concrete quality: field survey results from some 400 structures, in: *Proc. 5th Int. Conf. Durability of Building Materials and Components*, Span Press, London, 1991, pp. 262–271.
210

- [4] D. Bunte, Zum karbonatisierungsbedingten verlust der dauerhaftigkeit von auenbauteilen aus stahlbeton, Ph.D. thesis, Technischen Universitat Braunschweig (1994).
215
- [5] G.-W. Groves, A. Brough, I.-G. Richardson, C.-M. Dobson, Progressive changes in the structure of hardened C_3S cement pastes due to carbonation, J. American Ceramic Society 11 (74) (1991) 2891–2896.
- [6] Y. Kishitani, S. Hokoi, K. Harada, S. Takada, Prediction model for carbonation of concrete structures considering heat and moisture transfer, J. Structural and Construction Engineering Trans. AIJ 595 (2005) 17–23.
220
- [7] V.-G. Papadakis, C.-G. Vayenas, M.-N. Fardis, A reaction engineering approach to the problem of concrete carbonation, AIChE Journal 35 (10) (1989) 1639–1650.
- [8] D. Russell, P. Basheer, G. Rankin, A. Long, Effect of relative humidity and air permeability on prediction of the rate of carbonation, Structures & Buildings 3 (146) (2001) 319–326.
225
- [9] K. Sisomphon, Influence of pozzolanic material additions on the development of the alkalinity and the carbonation behaviour of composite cement pastes and concretes, Ph.D. thesis, TU Hamburg (2004).
230
- [10] T. Uomoto, Y. Takada, Factors affecting concrete carbonation rate, Durability of Building Materials Components 6 (1993) 1133–1141.
- [11] K. Tuutti, Corrosion of steel in concrete, Swedish Cement and Concrete Research Institute (CBI), Stockholm, 1982.
- [12] J. Crank, The Mathematics of Diffusion, 2nd ed., Clarendon Press, Oxford, 1975.
235
- [13] T. Aiki, A. Muntean, A free-boundary problem for concrete carbonation: rigorous justification of the \sqrt{t} -law of propagation, Interfaces and Free Boundaries 15 (2) (2013) 167–180.

- 240 [14] A. Muntean, A moving-boundary problem: Modeling, analysis and simulation of concrete carbonation, Ph.D. thesis, Faculty of Mathematics, University of Bremen, Germany (2006).
- [15] A. Muntean, M. Böhm, J. Kropp, Moving carbonation fronts in concrete: A moving-sharp-interface approach, *Chemical Engineering Science* 66 (3) 245 (2011) 538–547.
- [16] J. Crank, *Free and Moving Boundary Problems*, Oxford Science Publications, 1984.
- [17] H.-G. Landau, Heat conduction in a melting solid, *Quarterly of Applied Mathematics* 8 (1950) 81–95.
- 250 [18] S. K. Godunov, A difference scheme for numerical solution of discontinuous solution of hydrodynamic equations, *Math. Sbornik* (47) (1959) 271–306.
- [19] G.-D. Smith, *Numerical Solution of Partial Differential Equations: Finite Difference Methods*, 3rd ed., Clarendon Press, Oxford, 1985.
- 255 [20] J.-C. Strikwerda, *Finite difference schemes and partial differential equations*, 2nd ed., SIAM: Society for Industrial and Applied Mathematics, 2004.